



**Ministry of Environment
and Gender Equality**
Environmental
Protection Agency

Danish consumption and emission of F-gases – 2024

Environmental Project,
no 2311

January 2026

Title: Danish consumption and emission of F-gases – 2024

Purpose:

The purpose of this project is to quantify the Danish consumption and actual emissions of F-gases (HFCs, PFCs and SF6) on an annual basis. In addition, future emissions of F-gases are extrapolated up to 2050.

Prepared by: Tomas Sander Poulsen, Provice Aps

Prepared for: Chemicals & Biocides, The Danish Environmental Protection Agency

Financed by: The Danish Environmental Protection Agency

Delivery Date of the Report: 01.12.2025

Publisher: The Danish Environmental Protection Agency

Editors: Tomas Sander Poulsen, Provice

ISBN: 978-87-7564-066-9

Contents

Foreword	5
1. Overview	7
1.1 Full compliance with IPCC requirements	7
1.2 Danish consumption and emission of F-gases	9
2. Methodology	17
2.1 Scope and definition	17
2.2 IPCC requirements to emission factors, application areas and new F-gases	19
2.3 Explanation of terminology	21
3. F-gas import and consumption	23
3.1 Assessment of new F-gases	23
3.2 Import of substances	23
3.3 Consumption by application area	26
4. Emission of F-gases	31
4.1 Emissions of HFCs from refrigerants	31
4.2 Emissions of HFCs from PUR foam products and propellants	35
4.3 Emissions of sulphur hexafluoride	36
4.4 Emissions of perfluorinated hydrocarbons	37
References	39

Foreword

On behalf of the Danish Environmental Protection Agency (Danish EPA), Provice has conducted the emission calculation and reporting of Danish emission of F-gases. The emission calculation is provided in continuation of previous years' emission calculations /36/ and references herein.

The emission calculations of F-gases are extrapolated to 2050 in compliance with the revised methods from IPCC.

The assessment group consist of:

- Søren Nørby Pedersen, Danish Environmental Protection Agency
- Martin Alex Bjørnholst, Ministry of Environment and Gender Equality
- Katja Hossy Hjelgaard, Department of Environmental Science, Aarhus University
- Tomas Sander Poulsen, Provice ApS
- Mikkel Bosack Simonsen, Danish Ministry of climate, energy and utilities

KMO and DI were invited for reviewing the report.

The objective of the project was to quantify the Danish consumption and actual emissions of F-gases (HFCs, PFCs, and SF₆) for 2024.

The emission calculation is partly conducted to fulfil Denmark's international obligations to provide data and information on F-gas emissions, and partly to assess the Danish trend in consumption and emissions of HFCs, PFCs, and SF₆. Examples of previous reporting of Danish emissions is given in references, and most recently, in reference /36/.

The so-called F-gases are potent greenhouse gases and cause an increase in the ability of the atmosphere to retain surplus heat radiated from the earth. Consequently, the temperature of the earth's surface and lower atmosphere is increasing, and this leads to climate changes. There are several ozone-depleting substances that also have a strong greenhouse effect. These substances are regulated under the Montreal Protocol.

The potential effect of different greenhouse gases varies from substance to substance. This potential is expressed by a GWP value (Global Warming Potential). F-gases (HFCs, PFCs and SF₆) that do not have an ozone-depleting effect but have high GWP values are regulated by the Kyoto Protocol under the United Nation Climate Change Convention, and in the EU regulation.

1. Overview

1.1 Full compliance with IPCC requirements

Updated requirements to F-gas emission calculation have been introduced by United Nations Intergovernmental Panel for Climate Change (IPCC). The requirements comprise e.g. new F-gases, new emission factors for certain F-gases, new application areas and changes in product lifetime. Since 2015, the emission calculation has been in compliance with the new revised IPCC methodologies.

Overview of recent improvements in the calculation

Following recent improvements are introduced in the emission calculation of F-gases

- A CRF category 2.F.1.a for commercial stand-alone refrigerators is introduced. The category is introduced for HFC-134a and HFC 404a.
- The stand-alone commercial refrigeration category is introduced for the whole time serie
- The emission factor for charge of SF₆ in high-voltage power switches is adjusted from 5% to 0.25% from 2023 and onwards. This EF is the same as Finland and in same range as the other Nordic countries EF for charge
- The consumption and emission of HFC-32 imported as bulk is allocated from “other HFC’s” to a separate calculation only for HFC-32
- Projection model are adjusted for heat pumps from a steady state scenario until 2030 to a 20% decrease scenario until 2030. The recent years heat pump statistics illustrate a beginning decrease in heat pumps sold
- Projection model are improved with inclusion of service ban phase out dates for all substances and sectors and phase out of GWP levels according to the F-gas regulation
- Time-series for projection model prolonged to 2050

The lifetime of emission of SF₆ from laboratories is changed from one year to two years through the whole time-series. This change is made as a response from the latest in-country review recommendations.

Further, also lifetime for emission of HFC-134a and HFC-227e from MDI are changed from one year to two years through the whole time-series. This change is made as a common initiative to align calculation methods between the Nordic countries. Both one year and two years are in compliance with the IPPC guidance.

According to projection, it is introduced for all commercial refrigeration categories with high GWP refrigerants, that trend is steady state until 2025, whereafter the consumption will reduce 20% pr. year

The calculation model for heat pumps is modified to accomplish the accelerating innovation and introduction towards R290 (natural refrigeration) in especially monoblock units up to 20 kW. The model is based on expert judgement from heat pump producers. it is assumed that 50% of mono-block units (air-water) up to 20 kW are R290 in actual year increasing up to 100% in 2026 because of the F-gas regulation.

The refrigerant HFC-410A in transport refrigeration is introduced as a separate category (CRF 2.F.1.d) with separate emission calculation, based on consumption data from consumers.

In 2020, 10 new MDI products with HFC-134a and two new MDI products with HFC-227ea are applied for the category “medical dose inhalers” (CRF 2.F.4) for the full time series and HFC-32 in heat pumps was introduced.

In 2019, the emission factors for charge and operation of refrigerant in “stationary air-condition” (CRF 2.F.1.f) are consequently defined as 0,5% pr. charge and 10% in operation emission until 2009, and 3% operation emission from 2010 and forth.

In 2018, the group “other HFC’s” were split into five sub-groups – “HFC-410A”, “HFC-449A”, “HFC-452A” and “other HFC’s” and “HFO’s”. The sub-division is introduced for the full time series. Furthermore, the category “large and medium commercial refrigeration and stationery air-condition” for HFC-134a is divided into two categories – “medium and large commercial refrigeration (CRF 2.F.1.a)” and “stationary air-condition (CRF 2.F.1.f)” because new emission factors are applied for stationary air condition. The division is introduced for the full time series.

In 2017, a reduction of the emission factors for 2.F.1.f stationary A/C was introduced. From 2010 and onward, the emission factor is reduced from 10% to 3% in operation. This change is introduced to meet the later data for leakage rates from stationary A/C, which indicate levels of 1-3%. Furthermore, the new emission factor is in same range as the emission factor uses by the other Nordic countries (between 2-6%). The revision and update has changed the historical emissions from 2010 and forth. In 2017, a separate subcategory for heat pumps was introduced as well with consumption starting from 2009. It provides a more accurate picture of consumption and emissions related to HFC-407C and HFC-410A.

Finally, the reference years for calculating *emission from stock* are changed according to the IPCC guidance. Year T1 for emission from stock is now same year as product is placed on the market instead of the year after the product is placed on the market. The revision comprises the full time period 1995-2030 and assures consistency in the methodology as outlined in IPCC’s guidance.

Appendix 3 describes the specific emission factors, etc. used for emission calculations.

1.2 Danish consumption and emission of F-gases

1.2.1 Import

HFCs

Overall, there has been a reduction in total consumption of HFC refrigerants for almost all refrigerants.

The total bulk import reported by importers (minus re-export) of pure HFCs and HFC blends was 167.4 tonnes in 2024. Compared to 2023, where the import was 188.8 tonnes, the total import has decreased with approx. 20.7 tonnes, a decrease of 11%.

The bulk import of HFC-134a has decreased to 85.3 tonnes in 2024 from 99.5 tonnes in 2023. The HFC-134a consumption to maintain medium and large commercial refrigerants has decreased but consumption to maintenance of stationary air conditioning has increased.

The bulk import of HFC-404A has decreased by 0.87 tonnes to a total of 8.94 tonnes in 2024. The decrease of HFC-404A consumption for maintaining commercial refrigeration is significant.

Import of HFC-410A has decreased to 25.1 tonnes in 2024, which is a slight decrease compared to 2023 where the consumption was 25.2 tonnes. The consumption was extraordinarily high in 2022, but has since stabilised. HFC-410A is mainly used in stationary refrigeration and heat pumps.

The bulk import of HFC-407C was 10.7 tonnes for 2024, which is a significant decrease compared to 2023 where the import was 28.9 tonnes. HFC-407C is applied in stationary air condition. HFC-407c is used as a low GWP substitute for HFC-404a and HFC-507A. The decreased consumption of HFC-407c is probably because of conversions to HFO/HFC based refrigerant R-449C

In 2024 the bulk import of HFC-507A was 1.4 tonnes which is an increase compared to 2023, where the bulk import was 0.54 tonnes. HFC-507A is used for medium and large commercial refrigeration.

The import of the low GWP refrigerants HFC-449A was 10.3 tonnes in 2024, which is a slight decrease from 2023 where the import was 10.6 tonnes. The import of the low GWP refrigerants HFC-452A was 10.5 tonnes in 2024 which is a significant increase compared to 2023 where the import was 2.2 tonnes. The HFC's are a drop-in substitute for HFC-404A.

SF₆

The overall consumption of SF₆ in 2024 was approx. 0.43 tonnes. Consumption of SF₆ is related to power switches in high-voltage power systems.

PFCs

No PFC import is reported.

GWP average for HFCs

The EU F-gas Regulation 517/2014 includes the provision for the phase down of the quantities of F-gases (and blends) placed on the EU market by producers and importers. By 2030, the GWP target is a reduction of 21% with 2015 as reference year.

Table 1 below calculates the development of the average GWP for HFCs placed on the Danish market. In 2024 the average GWP is reduced with 26.0% compared to 2015. The calculation approach is applied from the impact assessment of the EU F-gas regulation and express

the development in average GWP for HFC's. By calculating the total potential CO₂ equivalent emission from imported HFC's in bulk and dividing the total GWP with the imported HFC's in tonnes, it expresses the average GWP for all imported HFC's. The average GWP has decreased from 2,333 pr. kg HFC in 2015 to 1,725 pr. kg HFC in 2024. A decrease of 26.0%. The reduction has exceeded the EU 2030 target of 21%.

	HFCs	Consumption, t	GWP value	%
2024	288,760	167	1,725	74.0
2023	318,999	188	1,697	72.7
2022	359,545	191	1,882	80.7
2021	455,034	231	1,969	84.4
2020	368,205	190	1,938	83.1
2019	405,055	202	2,005	85.9
2018	535,267	269	1,988	85.2
2017	620,689	271	2,292	98.2
2016	670,894	305	2,203	94.4
2015	656,914	282	2,333	100.0

TABLE 1.
DEVELOPMENT OF AVERAGE GWP FOR HFC PLACED ON DK MARKET, TONNES

1.2.2 Emission

The GWP-weighted actual emissions of HFCs, PFCs, and SF6 in 2024 were 298,641 tonnes CO₂ equivalents. It is an increase of 8,056 tonnes CO₂ equivalents compared to 2023, where the corresponding emissions were 290,586 tonnes CO₂ equivalents. The development is stipulated in table 2.

The emission distribution from sources is almost similar to the emission from 2023. The largest contributions to the F-gas emissions are from medium and large commercial refrigeration (34.9%), mobile AC (18.8%), heat pumps (17.9%), and stationary air-condition (16.8%). The remaining sources includes MDI (4.1%), power switches (3.9%), transport refrigeration (3.2%).

The F-gas emission accounts for approx. 1-1.5% of the total national GWP emission from all sources /31/.

In table 2 below, consumption, actual emissions and stock in products are summarized.

Source	Substance	Consumption and imports, DK, tonnes	Stock, tonnes	Actual emissions, tonnes	GWP contribution, CO2 eqv. tonnes	GWP contribution in total, CO2 eqv. tonnes
Refrigerants for commercial refrigerators and A/C systems	HFC-134a	46.0	323.7	24.6	35,151	
	HFC-404A	8.9	118.1	12.5	49,218	
	HFC-407C	10.7	266.6	11.6	20,497	
	HFC-410A	23.9	269.4	10.0	20,962	
	HFC-449A	10.3	52.2	2.8	3,930	
	HFC-452A	0.0	23.1	2.0	4,368	
	HFC-507	1.4	28.7	3.5	14,021	
	Other HFCs	5.4	31.9	3.0	6,195	
All substances						154,343
Refrigerants in domestic and special fridges/freezers	HFC-134a	0.0	9.2	0.0	58	
	HFC-404a	0.0	7.1	0.1	285	
	PFC-14	0.0	0.2	0.0	7	
	All substances					350
Insulation foam in domestic fridges/freezers	HFC-134	0.0	0.0	0.0	0	
	HFC-152	0.0	0.0	0.0	0	
All substances						0
Refrigerants for mobile A/C systems	HFC-134a	39.2		39.2	56,036	56,036
Refrigerated vans and lorries	HFC-134a	0.1	0.2	0.1	80	
	HFC-404A	0.0	5.0	1.0	3,997	
	HFC-410A	1.2	2.6	0.5	1,138	
	HFC-452A	10.4	12.0	2.1	4,476	
All substances						9,691
Aerosol sprays etc.	HFC-134a	0.0	0.0	0.0	0	0
Hard Foam etc.	HFC-152a	0.0	30.3	3.1	384	384
MDI	HFC-134a	7.0	3.5	7.0	10,055	
	HFC-227ea	0.7	0.3	0.7	2,240	
All substances						12,295
Heat pumps	HFC-407c	0.0	0.0	0.0	0	
	HFC-410A	12.2	434.6	21.8	45,545	
	HFC-32	53.9	355.9	11.7	7,882	
All substances						53,428
Liquid cleaners	PFC	0.0	0.0	0.0	0	
Fibre optics	PFC-14	0.0	0.0	0.0	0	
	PFC-318	0.0	0.0	0.0	0	
	HFC-23	0.0	0.0	0.0	0	
All substances						0
Double glazing	SF6	0.0	0.0	0.0	0	0
High-voltage power switches	SF6	0.4	102.8	0.5	11,758	11,758
Laboratories	SF6	0.0	0.0	0.0	358	358
Total	HFCs	231.3	1,618.4	143.1	286,519	
	PFCs	0.0	0.2	0.0	7	
	SF6	0.4	102.8	0.5	12,115	
GWP contribution	Total		1,721.5	143.6	298,641	298,641

TABLE 2.

CONSUMPTION, ACTUAL EMISSIONS, STOCK, ACTUAL EMISSION AND GWP CONTRIBUTION FROM F-GASES, TONNES

In Figure 1, the relative contributions of HFCs, PFCs, and SF₆ to the total emission in CO₂-equivalents are shown for application areas for 2024.

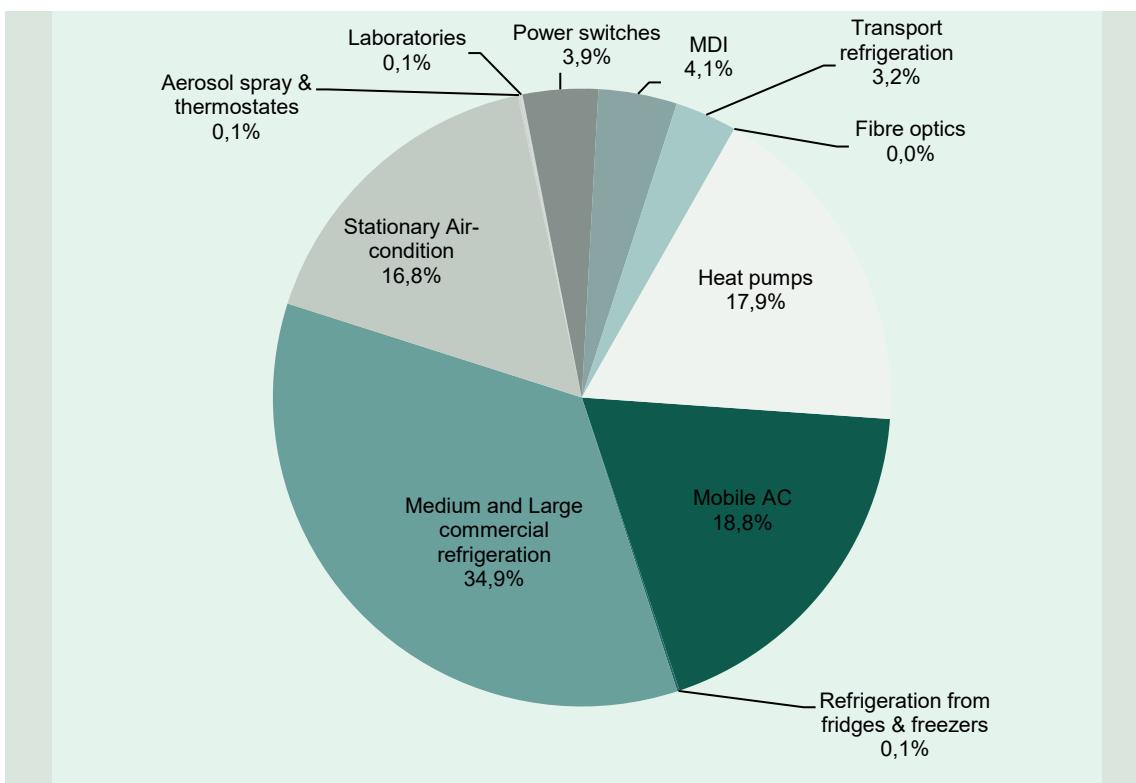


FIGURE 1.

RELATIVE DISTRIBUTION OF GWP EMISSIONS BY APPLICATION AREA

The figure determines that the emissions from refrigerants used in medium and large size commercial refrigerators account for the largest GWP contribution. This source covers 34.9% of the total actual emission of F-gases in 2024, corresponding to 104,312 tonnes CO₂-equivalents. The main contribution is from HFC-404A that accounts for 49,218 tonnes CO₂-equivalents.

The second-largest source for GWP contribution occurs from mobile A/C (MAC), accounting for 56,036 tonnes CO₂-equivalents, which constitutes 18.8% of the total emission. This is a slight decrease compared to 58,852 tonnes CO₂-equivalents in 2023.

The third-largest source is heat pumps accounting for 17.9% (53,428 tonnes CO₂-equivalents) of the total GWP contribution, and the fourth-largest source is stationary air conditioning, which contributes with 16.8% (50,030 tonnes CO₂-equivalents).

The total HFCs' contribution comprises 95.9% of the overall GWP contribution in 2024, emissions of SF₆ is 4.1%.

HFCs

Actual emissions of HFCs have been calculated to 286,519 tonnes CO₂ equivalents. In 2023, emissions were approximately 277,816 tonnes CO₂-equivalents. It is an increase of 8,703 tonnes CO₂ equivalents.

SF₆

Actual emissions have been calculated to a GWP contribution of 12,115 tonnes CO₂ equivalents. In 2023, the emissions were 12,216 tonnes CO₂ equivalents. The decrease is small.

PFCs

The total GWP-weighted PFC emission was 7 tonnes CO₂ equivalents in 2024.

1.2.3 Trends in total GWP contribution from F-gases

The figure below shows the trend in Danish GWP contributions from HFCs, PFCs, and SF₆ for 1992-2024. The differences from the present calculations of the total GWP value compared with earlier calculation methods are illustrated in the figure.

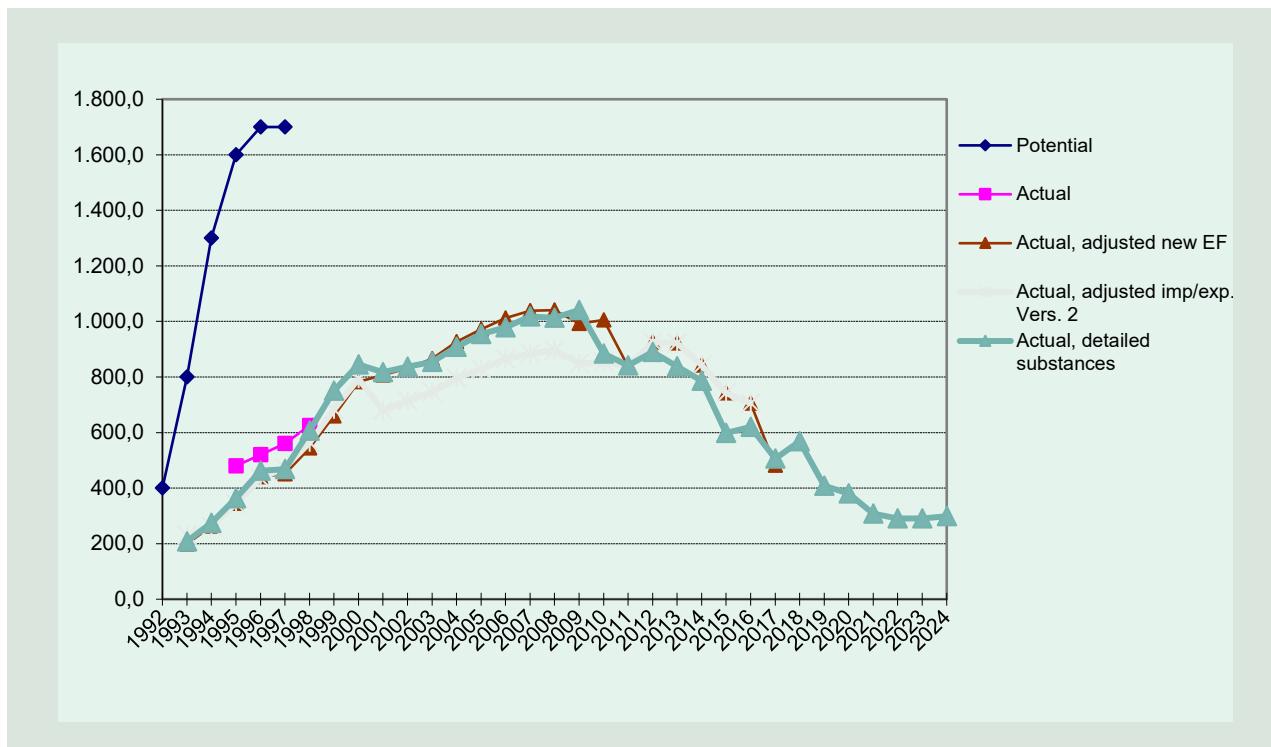


FIGURE 2.

GWP-WEIGHTED POTENTIAL, ACTUAL AND, ADJUSTED ACTUAL EMISSIONS 1992-2024, 1000 TONNES CO₂ EQUIVALENTS

The GWP emission has increased from 1992-2008 and peaked in 2009, whereafter it indicates a significant decreasing trend from 2013 onwards.

Development in the GWP contribution for the period can also be seen in table 3 below.

Year	Potential	Actual	Actual, adjusted imp/exp. Vers. 2	Actual, adjusted new EF	Actual, detailed substances
1992	400.0				
1993	800.0		230.3	198.8	207.9
1994	1,300.0		263.2	262.8	274.3
1995	1,600.0	480.0	344.1	344.5	363.4
1996	1,700.0	520.0	434.7	440.1	462.8
1997	1,700.0	560.0	472.5	451.2	468.7
1998		625.0	563.7	543.6	606.1
1999			682.8	659.7	750.8
2000			793.3	782.2	845.0
2001			679.0	807.2	817.7
2002			715.0	831.5	836.5
2003			746.0	866.2	854.0
2004			795.0	926.6	908.1
2005			829.0	971.3	953.9
2006			865.0	1,012.4	979.1
2007			884.4	1,038.7	1,017.9
2008			895.7	1,040.7	1,012.7
2009			848.4	992.7	1,041.0
2010			854.4	1,004.9	883.6
2011			837.7	837.7	841.6
2012			925.2	925.2	889.6
2013			922.4	922.4	838.4
2014			842.7	842.7	786.2
2015			742.0	742.0	597.9
2016			705.0	705.0	620.1
2017				482.0	506.0
2018					568.6
2019					407.8
2020					380.2
2021					307.4
2022					290.9
2023					290.6
2024					298.6

TABLE 3.

TOTAL GWP-CONTRIBUTION FROM HFC'S, PFC'S, SF₆, 1992-2024 DETERMINED ACCORDING TO THE FOUR DIFFERENT METHODS OF CALCULATION APPLIED DURING THIS PERIOD, 1000 TONNES CO₂ EQUIVALENTS.

Table 4 below shows the time series 1993-2024 and the 2024-2050 projections of F-gases (1,000 tonnes CO₂ equivalents).

The calculated GWP contribution expresses actual emissions, adjusted for imports and exports.

Year	HFC-134a	HFC-152a	HFC-404A	HFC-401A	HFC-402A	HFC-407C	HFC-410A	HFC-449A	HFC-452A	HFC-507A	HFC-23	HFC-32	HFC-227ea	Other HFCs	PFCs	SF6	Total pr year
1993	106.3	3.7	-	-	-	-	-	-	-	-	-	-	-	-	-	97.8	207.9
1994	148.7	5.7	2.8	-	0.2	-	-	-	-	-	-	-	-	-	0.1	116.8	274.3
1995	228.8	5.4	21.8	-	1.5	-	-	-	-	-	-	-	-	0.4	0.6	104.9	363.4
1996	318.2	4.0	69.1	-	4.6	-	-	-	-	-	-	-	-	3.5	2.1	61.4	462.8
1997	272.0	1.9	107.3	0.0	8.3	0.4	-	-	-	0.5	-	-	-	7.2	5.2	66.0	468.7
1998	332.6	1.2	170.4	0.0	9.5	2.9	-	-	-	3.7	-	-	-	9.8	11.5	64.5	606.1
1999	381.1	4.7	249.6	0.1	10.8	6.2	-	-	-	7.3	-	-	-	12.4	15.7	62.9	750.8
2000	397.1	2.0	313.2	0.1	11.9	12.8	-	-	-	11.4	-	-	-	17.0	22.6	56.8	845.0
2001	397.9	1.6	284.1	0.1	11.6	19.4	0.0	-	-	18.4	10.4	-	-	20.1	27.9	26.2	817.7
2002	399.2	1.6	307.1	0.1	10.3	25.9	0.2	-	0.1	18.2	-	-	-	21.4	28.0	24.4	836.5
2003	359.1	0.2	348.4	0.1	8.2	39.3	0.8	-	0.7	21.8	-	-	-	23.3	24.6	27.5	854.0
2004	370.0	0.8	375.9	0.1	7.8	52.7	1.2	-	0.6	23.4	-	-	-	25.5	20.5	29.6	908.1
2005	352.4	0.2	430.3	0.1	6.8	64.3	1.7	-	0.6	25.0	-	-	-	26.6	18.8	27.2	953.9
2006	347.3	0.4	451.4	0.1	6.1	69.0	2.3	-	0.5	24.7	1.2	-	-	27.2	21.2	27.7	979.1
2007	351.4	0.5	472.8	0.1	5.5	74.1	3.8	-	0.6	24.9	3.6	-	-	26.7	21.2	32.7	1,017.9
2008	333.4	0.6	485.0	0.0	6.2	76.4	6.2	-	1.4	26.4	1.8	-	-	26.6	18.4	30.2	1,012.7
2009	325.6	0.6	506.0	0.0	6.4	83.2	9.0	-	1.8	24.8	3.6	-	-	28.4	19.5	32.1	1,041.0
2010	305.2	0.7	444.0	0.0	1.1	27.3	3.1	-	1.6	24.9	5.3	-	-	24.1	10.2	36.0	883.6
2011	261.7	0.6	403.2	0.1	-	33.2	4.0	-	2.1	29.6	5.3	-	-	17.7	7.7	76.3	841.6
2012	283.1	0.7	385.2	-	-	36.0	4.9	-	2.3	26.9	1.8	-	-	15.5	3.5	129.6	889.6
2013	233.5	0.9	362.4	-	-	42.4	6.1	-	2.5	25.6	-	-	-	15.5	3.7	145.7	838.4
2014	203.5	0.7	319.0	-	-	42.2	10.4	-	2.8	34.2	2.1	-	-	10.5	2.7	158.3	786.2
2015	141.0	0.8	236.4	-	-	39.6	14.0	-	3.9	22.8	-	-	0.4	10.0	0.0	129.0	597.9
2016	158.3	0.8	249.7	-	-	48.0	18.1	-	4.3	30.3	-	-	0.9	12.7	0.0	97.0	620.1
2017	118.2	0.7	194.1	-	-	45.3	22.6	-	2.5	26.3	-	-	1.3	12.7	1.1	81.1	506.0
2018	156.5	0.7	229.6	-	-	41.7	27.9	0.0	2.9	23.8	-	-	1.8	9.6	0.0	74.1	568.6
2019	108.6	0.7	122.6	-	-	35.1	34.9	0.8	5.2	17.7	-	-	2.2	7.7	1.1	71.2	407.8
2020	118.9	0.6	106.7	-	-	33.4	40.1	1.5	6.5	16.6	-	1.0	2.5	5.9	0.0	46.5	380.2
2021	115.5	0.6	63.0	-	-	27.1	46.8	2.1	8.8	17.9	-	2.1	2.4	6.3	0.0	14.7	307.4
2022	98.9	0.5	55.1	-	-	31.6	51.8	2.8	8.3	15.7	-	4.5	2.5	6.4	0.0	12.7	290.9
2023	106.7	0.4	55.5	-	-	21.0	52.7	3.2	8.5	14.6	-	6.6	2.5	6.0	0.6	12.2	290.6
2024	101.4	0.4	53.5	-	-	20.5	67.6	3.9	8.8	14.0	-	7.9	2.2	6.2	0.0	12.1	298.6
2025	105.1	0.3	55.0	-	-	19.0	62.4	4.5	11.8	10.8	-	9.1	2.2	7.9	0.0	11.7	299.9
2026	90.9	0.3	46.9	-	-	17.6	62.5	5.1	12.0	12.7	-	10.2	2.2	6.1	0.0	11.7	278.2
2027	74.4	0.2	38.1	-	-	16.3	64.2	5.6	12.5	12.7	-	10.9	2.1	7.9	0.0	11.7	256.7
2028	64.1	0.1	34.2	-	-	13.6	60.7	5.7	14.8	-	-	11.4	1.9	10.2	0.0	11.7	228.4
2029	52.4	0.1	27.9	-	-	10.5	58.6	5.5	12.6	-	-	11.8	1.7	0.1	0.0	11.7	192.9
2030	43.9	0.0	14.5	-	-	11.7	43.5	5.3	16.3	-	-	15.5	1.5	0.1	0.0	11.6	164.0
2031	27.8	0.0	1.2	-	-	9.3	45.9	4.9	14.4	-	-	14.7	1.4	0.0	0.0	11.6	131.3
2032	36.8	0.0	1.0	-	-	8.0	34.9	5.9	13.3	-	-	18.7	1.2	-	0.0	11.6	131.5
2033	27.9	0.0	0.6	-	-	3.0	-	-	-	-	-	-	-	-	-	11.6	43.1
2034	21.7	0.0	0.5	-	-	-	-	-	-	-	-	-	-	-	-	11.6	33.8
2035	17.6	0.0	0.0	-	-	-	-	-	-	-	-	-	-	-	-	11.5	29.2
2036	15.1	0.0	0.4	-	-	-	-	-	-	-	-	-	-	-	-	11.5	26.9
2037	15.5	-	0.3	-	-	-	-	-	-	-	-	-	-	-	-	11.5	27.3
2038	11.3	-	0.2	-	-	-	-	-	-	-	-	-	-	-	-	11.5	23.1
2039	8.1	-	0.2	-	-	-	-	-	-	-	-	-	-	-	-	11.5	19.8
2040	3.4	-	0.2	-	-	-	-	-	-	-	-	-	-	-	-	11.4	15.0
2041	2.8	-	0.1	-	-	-	-	-	-	-	-	-	-	-	-	11.4	14.3
2042	2.3	-	0.1	-	-	-	-	-	-	-	-	-	-	-	-	11.4	13.8
2043	1.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	11.4	13.3
2044	1.6	-	0.1	-	-	-	-	-	-	-	-	-	-	-	-	11.4	13.0
2045	1.4	-	0.1	-	-	-	-	-	-	-	-	-	-	-	-	11.3	12.8
2046	1.2	-	0.0	-	-	-	-	-	-	-	-	-	-	-	-	11.3	12.6
2047	1.1	-	0.0	-	-	-	-	-	-	-	-	-	-	-	-	11.3	12.4
2048	0.9	-	0.0	-	-	-	-	-	-	-	-	-	-	-	-	11.3	12.2
2049	0.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	11.3	12.1
2050	0.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	11.2	12.0
Sum	8,548.4	45.9	8,096.7	0.9	116.7	1,159.9	863.1	57.0	185.1	607.7	34.9	124.5	33.0	475.3	288.5	2,170.9	22,808.4

TABLE 4.

TOTAL GWP-EMISSION FROM HFC'S, PFC'S SF₆, 1993-2050, 1,000 TONNES CO₂ EQUIV-
ALENTS

The GWP emission from 2041 to 2050 is projected stable with a total emission below approx. 15,000 tonnes CO₂ equivalents pr. year. The main source is SF6 from power switches.

2. Methodology

The emission calculation is made in accordance with the IPCC guidelines (Intergovernmental Panel on Climate Change) /4/.

The methodology includes calculation of the actual emissions of HFCs, PFCs, and SF₆. In this calculation of actual emissions, the release from stock of greenhouse gases in equipment and in products has been considered, and adjustments have been made for imports and exports of the greenhouse gases in products.

Appendix 3 describes the specific emission factors, etc.

2.1 Scope and definition

The emission calculation of the actual emissions of HFCs, PFCs and SF₆ has over years become increasingly more comprehensive and accurate along with the development of internationally approved guidelines (IPCC Guidelines) and guidance (IPCC Good Practice Guidance /22/) and the provision of increasingly detailed data.

The evaluation of the actual emissions includes quantification and calculation of any imports and exports of HFCs, PFCs, and SF₆ in products, and it includes substances in stock. This is in accordance with the latest and most accurate method of calculation (Tier 2) among the options provided for in the IPCC Guidelines /22/.

Estimation of Consumption and emissions

The calculation of consumption, emissions and stock was carried out based on information from five sources:

- Importers, agency enterprises, wholesalers, and suppliers
- Consuming enterprises, and trade and industry associations
- Danish Environmental Protection Agency
- Official trade statistics
- Previous evaluations of HFCs, PFCs and SF₆ /32/.

Information for the present emission calculation is collected through questionnaire surveys combined with follow up telephone interviews of stakeholders relevant for F-gas consumption and emissions.

The result of the project is primarily based on the information received from enterprise and importer respondents and information from KMO and Danish EPA is used as a supplement to verify parts of the collected data.

The information collected from importers and suppliers is compared with information from consumer enterprises in order to monitor any discrepancies between purchase and sales information and to identify application of the use of substances. In some cases, the use of individual substances was estimated based on two sources, since the majority of the consuming enterprises were known. In cases where not all enterprise end-users had specified the application area for substances, the consumption of individual substances was estimated based on the information provided by importers, suppliers, and any trade and industry-related associations.

There may be inconsistencies between the information provided by suppliers and enterprise end-users. This is partly due to imports from other EU countries, changes in inventories of substances, or a lack of correlation between the quantities sold and the quantities consumed. It is also partly due to a certain amount of uncertainty in the method of calculation used by enterprises. However, sales and consumption information has been harmonised.

The estimated average degree of uncertainty in the report's consumption figures (quantities sold and bought) is about 10-15 per cent, and slightly greater for data regarding application areas. The degree of uncertainty in the calculation of actual emissions is estimated at 20-25 per cent, depending on import/export information for the specific products.

The calculation of F-gas emission is based on a calculation of *actual emissions*.

Actual emissions are emissions in the relevant year, accounting for the time lapse between consumption and emissions. Actual emissions include Danish emissions from production, from products during their lifetimes, and from the disposal of products. Actual emissions for the specific areas of application are determined on basis of the following approaches:

Tier 2 "Top-down" analysis

In the Tier 2 Top-down analysis, emissions are determined on the basis of information on consumption in the various areas of application and calculated to estimated emissions in the area of application.

Calculating consumption for refilling mobile A/C (MAC)

The method for calculating the consumption of refrigerant related to MAC is based on collection of data from all Danish importers of HFC-134a supplying refrigerants to refilling in mobile A/C systems installed in vehicles. While these importers only operate in the MAC refrigeration market the import data can be isolated to consumption of refrigerants to MAC. Therefore, the following methodology can be applied corresponding to the Tier 2 top down approach:

Consumption/Sale from MAC refrigerant importers in year X = refilled stock = actual emission from MAC in Denmark in year X.

Tier 2 "Bottom-up" analysis.

In the Bottom-up analysis, the estimated emissions for a specific application area are based on information from producers using substances in production and in products; information on imports and exports of products; information on the technological developments within the application areas; information on the average amount of greenhouse gases contained in products; and information on the lifetime of products and actual emissions during their use and disposal.

Tier 2 bottom-up analyses were carried out within selected areas over several years. The analysis quantified the stock and, in some cases, Danish emission factors. Detailed analyses were carried out for commercial refrigerators, mobile A/C systems, fridges, freezers, and SF₆ power switches. Analyses were evaluated in separate reports /2, 11, 16/.

Bottom-up comprises:

- Screening of the market for products in which greenhouse gases are used.
- Defining the average content of greenhouse gases per product unit.
- Defining the lifetime and the disposal emissions of products.
- Identifying technological characteristics and trends of significance for emissions of greenhouse gases.

- Calculating imports and exports based on defined key figures such as average content in products, Statistics Denmark's foreign trade statistics, and information from relevant industries.

As far as possible, the consumption and emissions of greenhouse gases have been evaluated individually, even though consumption of certain HFCs has been very limited. This was done to ensure transparency and consistency in time in the calculation of the sum of HFCs as their GWP value. However, it was necessary to operate with a category for "Other HFCs", as not all importers and suppliers have detailed records of sales of individual substances. There has been a growing trend of using new, low-GWP substances. Therefore, the recent years calculations have introduced several new, separate substances categories – HFC-32, HFC-449A, HFC-452A and HFOs. These substances were previously calculated as "Other HFCs" category, but due to the steady increase in use, import and emissions, they are now calculated separately for each of these substances. This change provides more accurate conclusions on GWP trends. This change has also entailed that the historical emissions have been changed.

Uncertainty varies from substance to substance. Uncertainty is highest for HFC-134a due to its widespread application in products imported and exported. The largest uncertainty in the analysis of substances by application areas is assessed to concern the breakdown of consumption of HFC-404A and HFC-134a between commercial stationary refrigerators and mobile A/C systems. This breakdown is significant for the short-term (about 5 years) emissions calculations, but will balance in the long term. This is because the breakdown is only significant for the rate at which emissions are released.

Appendix 3 shows an overview of all application areas included with descriptions of the bases of calculation.

In Appendix 1, the table shows the F-gases covered by the Kyoto Protocol under the Climate Change Convention, including their chemical formulas and new revised GWP values (Global Warming Potential).

2.2 IPCC requirements to emission factors, application areas and new F-gases

The new revised emission factors from IPCC for a number of F-gases are fully implemented. The change in emission factors is revised for the full time period 1992-2050 to ensure consistency in the methodology as outlined in IPCC's guidance.

According to the IPCC guidance, new application areas have been identified by IPCC. The application areas are:

- TFT flat panel displays (not occurring)
- Photovoltaics (not occurring)
- Heat transfer fluid (not occurring)
- Military applications (investigated further)
- Accelerators (not occurring)
- Soundproof windows (already included in DK calculation)
- Adiabatic properties - shoes and tyres (already included in DK calculation)
- Closed cell foam (already included in DK calculation)
- Hard cell foam (already included in DK calculation)

The new application areas were assessed in relation to the Danish context, and one new application area – "Military Appliances" was relevant to investigate further to determine, whether new consumption- and emission areas should be included in the F-gas emission calculation. The conclusion is, that there is no new use of F-gases from "Military Appliances" and it is therefore not relevant to include this area in the F-gas calculation.

Further, several new F-gases was included in the emission assessment and calculation after 2015 IPCC amendment. The new F-gases are NF₃, and new HFC's and PFC's. Starting from the 2013 calculation, all new F-gases have been included. The new HFC's were already included in previous calculations, and the new PFC's are not used in DK. According to NF₃, a particular survey among relevant importers has been conducted in 2015 and no import or stocks of NF₃ was identified and no new NF₃, import has been registered since.

The emission projections are determined by following assumptions:

- Steady state consumption using most recent year as the reference year including the cut-off dates for the phasing-out of specific substances, cf. the Statutory Order regulating certain industrial greenhouse gases /30/ and the F-gas regulation.
- *Medium and large commercial refrigeration (2.F.1.a):* Consumption of HFC-134a, HFC-404A are steady state consumption using most recent year as the reference year until 2025. From 2026, the consumption decreases with 20% per year. Consumption is phased out from 2032 where service ban for +750 GWP for commercial refrigeration and stationary A/C are introduced
- *Medium and large commercial refrigeration – low GWP refrigerants (2.F.1.a):* Consumption of HFC-449A, HFC-452A are steady state consumption using most recent year as the reference year. Consumption is phased out from 2032 where service ban for +750 GWP for commercial refrigeration and stationary A/C are introduced
- *Stand-alone domestic refrigeration (2.F.1.b):* Consumption of HFC-134a is steady state consumption using most recent year as the reference year
- *Transport refrigeration (2.F.1.d):* Steady state consumption using most recent year as the reference year
- *Mobile air-condition, MAC (2.F.1.e):* Consumption of HFC-134a is steady state consumption using most recent year as the reference year until 2025. From 2026, the consumption decreases with 20% per year. The assumption is made with reference to a graduated increased effect of the MAC Directive require only HFOs in new person cars introduced to the EU market
- *Stationary air-condition (2.F.1.f):* Consumption of HFC-134a, HFC-404A, HFC-407C, HFC-410A are steady state consumption using most recent year as the reference year until 2025. From 2026, the consumption decreases with 20% per year. Consumption is phased out from 2032 where service ban for +750 GWP for commercial refrigeration and stationary A/C are introduced
- *Stationary air-condition – low GWP refrigerants (2.F.1.f):* Consumption of HFC-449A, HFC-452A are steady state consumption using most recent year as the reference year. Consumption is phased out from 2032 where service ban for +750 GWP for commercial refrigeration and stationary A/C are introduced
- *Heat pumps (2.F.1.f):* The model for calculating consumption of HFC's in heat pumps are based on statistic from sold heat pumps to DK market. The projection of HFC-32 in air-air heat pumps are steady state using most recent year as reference. The projection of consumption of HFC-32 in monoblock units are based on a relative deduction of stock pr. year until 2026, where R290 are expected fully phased in as substitute for HFC-32 in monoblock units. The consumption of HFC-410 in other air-water

units are steady state using most recent year as the reference year. From 2030 service ban with HFC's for heat pumps are introduced.

- *Medical Dose Inhalers and Aerosol spray (2.F.4):* Steady state consumption using most recent year as the reference year
- *Switchgear (2.G.1):* Steady state consumption of SF₆ using most recent year as the reference year.

2.3 Explanation of terminology

The following terms and abbreviations are used throughout this report:

- *Enterprise end-user:* A producer that uses greenhouse F-gases in connection with production processes in the enterprise.
- *Emission factor:* The factor used in the calculation of emissions from a product or a production process.
- *Consumption:* Quantities of substances reported in Denmark in the year in question via imports from wholesalers and information from Danish enterprise end-users.
- *Importer:* Enterprises in Denmark that import (from EU and outside EU) and sell the relevant substances on the Danish market.
- *KMO:* On behalf of the Danish Environmental Protection Agency, KMO issues HFC and SF6 gas authorizations as well as AC EU certificates for companies and individuals in the automotive industry.
- *Stock:* The amount of substance contained in equipment and products in use in Denmark.

3. F-gas import and consumption

3.1 Assessment of new F-gases

From 2013 it was required by IPCC to include several new F-gases in the emission calculation. These new F-gases were screened to determine whether the substances were used as bulk or imported in products in Denmark.

3.1.1 NF₃

Nitrogen trifluoride (NF₃) is used in the plasma etching of silicon wafers. Today NF₃ is predominantly employed in the cleaning of chambers in the high-volume production of liquid crystal displays and silicon-based thin film solar cells. NF₃ has been considered as an environmentally preferable substitute for SF₆ or PFC. NF₃ is also used in hydrogen fluoride and deuterium fluoride lasers, which are types of chemical lasers.

All national importers of F-gases have been requested to provide information about eventual import of new F-gases from EU or outside EU. None has imported NF₃ in 2024 or in any previous year.

NF₃ is therefore considered non-existing in Denmark.

3.1.2 HFCs from the latest IPCC Refinement

The new HFCs from IPCC refinement are:

- HFC-152
- HFC-161
- HFC-236cb
- HFC-236ea
- HFC-245fa
- HFC-365mfc

No import of HFC-245fa has been registered. No importers confirm import of any other of these HFC's in 2024. Previously, a minor amount of HFC-245fa was imported as refrigerant, and also HFC-365mfc was imported for a few years as foam blowing agent before it was banned in 2006 due to the Danish legislation of phasing out F-gases in among others foam blowing. These two F-gases have already been included in the previous emission calculations.

3.1.3 New PFCs

The new PFCs are:

- Perfluorodecalin – PFC-9-1-18 (C₁₀F₁₈)
- Perfluorocyclopropane (c-C₃F₆)

No importers confirm import of these PFC's in 2024 or any previous years.

3.2 Import of substances

An overview of imports of F- gases is stipulated in Table 4 (chapter 1), based on information from importers for the years 1992-2024.

3.2.1 HFCs

HFCs were imported by ten enterprises in 2024, either for resale or use in own production.

Overall, there has been a reduction in total consumption of HFC refrigerants.

The total bulk import reported by importers (minus re-export) of pure HFCs and HFC blends was 167.4 tonnes in 2024. Compared to 2023, where the import was 188.0 tonnes, the total import has decreased with approx. 20.7 tonnes, a decrease of 11%.

The bulk import of HFC-134a has decreased to 85.3 tonnes in 2024 from 99.5 tonnes in 2023. The consumption of HFC-134a for MAC has decreased 2 tonnes, and HFC-134a for commercial refrigeration has decreased with 12.2 tonnes.

The bulk import of HFC-404A has decreased by 0.87 tonnes to a total of 8.94 tonnes in 2024. In 2023 there was a significant decrease in consumption of HFC-404A – this was also the case for previous years, except 2022 where there was an increase in the consumption of HFC-404A. A further decrease of HFC-404A applied in commercial refrigeration is expected within the next years, because of the general introduction of low GWP refrigerants and substitution to e.g., CO₂ units.

Import of HFC-410A in 2024 is 25.1 tonnes, which is nearly the same as the corresponding import in 2023 (25.2 tonnes). In 2023 there was a significant decrease of 25% compared to 2022. HFC-410A is mainly used in stationary refrigeration and heat pumps. 1.2 tonnes were used for transport refrigeration.

The bulk import of HFC-407C was 10.7 tonnes for 2024 which is a significant decrease compared to 2023 where the import was 28.9 tonnes. HFC-407C is applied in stationary air condition. Most old HCFC-22 appliances are replaced now, so consumption of HFC-407C is mainly related to fillings in heat pumps.

In 2024 the bulk import of HFC 507A was 1.40 tonnes. HFC-507A is used for medium and large commercial refrigeration. HFC-507 is a drop-in refrigerant in old commercial refrigeration systems.

The bulk import of HFC-32 in 2024 was 9.78 tonnes, which is an increase compared to 2023 where the import was 7.76 tonnes.

The import of 'Other HFCs' in 2024 was 5.44 tonnes, which is an increase compared to the 2023 consumption of 3.56 tonnes. The import of 'Other HFCs' has an increasing trend.

The import of HFC-449A was 10.3 tonnes in 2024. In 2023 the import was 10.6 tonnes. The import of HFC-452A was 10.5 tonnes in 2024 which is a large increase compared to an import of 2.20 tonnes in 2023. These refrigerants are low-GWP substitutes.

There was no import of HFC-152a in 2024, as well as 2023.

With regard import of HFCs in products, two categories are calculated:

Medical Dose inhalers (MDI)

- HFC-134a
- HFC-227ea

Heat pumps

- HFC-410A
- HFC-32

In 2024, the import of HFC-134a in MDIs was calculated to be approx. 7.0 tonnes and the import of HFC-227ea in MDI was calculated to be 0.7 tonnes.

The import of HFC-32 in air-air heat pumps in 2024 is estimated to 53.9 tonnes compared to 93.2 tonnes in 2023. The import of HFC-410A in air-water heat pumps in 2024 is estimated to be 12.2 tonnes – this has decreased from 20.2 tonnes in 2023. The reduction of HFC-410A is a consequence of the introduction of R290 (natural refrigerant) in monoblock units.

3.2.2 Sulphur hexafluoride

Three importers reported an import of 0.43 tonnes of sulphur hexafluoride in 2024. It is a decrease from 2.1 tonnes in 2023. Sulphur hexafluoride is mainly used in power switches. A very small amount is also used in laboratories, including plasma erosion, analytical purposes, particle accelerators, radiotherapy equipment and electronic microscopes.

3.2.3 Perfluorinated hydrocarbons

There was no import of PFC's in 2024. In 2023 there was reported a small import of 70 kg. PFC-14 (tetrafluoromethan - CF₄). There was no report of PCF-14 imports from 2018-2022. PFC-14 can be used for technical purpose in fibre-optics production and as low temperature refrigerant (laboratory) in stand-alone commercial applications.

Table 5 below contains an overview of the bulk import of all F-gases since 1992.

Year / Substance	HFC-134a	HFC-152a	HFC-401A	HFC-402A	HFC-404a	HFC-407C	HFC-507	HFC-410A	HFC-449A	HFC-452A	HFC-32	Other HFCs ¹	All HFCs	SF6
1992	20.0	4.0	-	-	-	-	-	-	-	-	-	-	24.0	15.0
1994	524.0	51.0	-	-	36.0	-	-	-	-	-	-	-	611.0	21.0
1995	565.0	47.0	-	-	119.0	-	-	-	-	-	-	14.0	745.0	17.0
1996	740.0	32.0	-	-	110.0	-	-	-	-	-	-	20.0	902.0	11.0
1997	700.0	15.0	-	-	110.0	-	-	-	-	-	-	16.0	841.0	13.0
1998	884.0	14.0	15.0	10.0	146.0	17.0	10.0	-	-	-	-	15.0	1111.0	9.0
1999	644.6	35.8	15.0	10.0	193.7	40.0	10.0	-	-	-	-	29.0	978.1	12.1
2000	711.1	16.4	9.5	4.2	193.1	44.7	23.8	-	-	-	-	24.0	1026.8	9.0
2001	472.8	11.1	4.1	0.8	126.2	40.3	2.2	0.7	-	-	-	22.7	680.9	4.7
2002	401.6	11.9	-	-	188.7	89.1	14.4	2.7	-	3.3	-	18.9	730.6	1.4
2003	241.2	3.3	0.2	1.7	145.0	96.8	9.2	2.7	-	-	-	40.3	540.4	2.2
2004	306.5	11.0	-	-	252.6	101.3	10.6	2.6	-	-	-	25.0	709.6	2.3
2005	235.4	5.5	-	-	162.4	61.6	5.4	3.1	-	-	-	28.4	501.8	3.6
2006	280.7	11.6	-	-	176.4	70.6	6.1	7.7	-	-	-	72.4	625.4	4.2
2007	160.7	13.0	-	-	129.9	50.5	11.4	12.8	-	4.5	-	13.2	396.0	5.4
2008	164.5	15.0	-	-	114.1	76.8	1.8	16.9	-	2.7	-	175.0	566.8	5.9
2009	175.3	12.0	-	-	106.9	49.3	7.0	12.1	-	-	-	16.8	379.4	4.3
2010	160.6	15.0	-	-	103.6	42.4	9.1	16.0	-	3.0	-	3.4	353.1	3.8
2011	180.5	8.0	-	-	105.0	42.8	6.1	15.5	-	2.0	-	12.0	371.9	3.1
2012	171.7	13.0	-	-	99.5	42.7	12.1	21.5	-	2.0	-	1.5	364.1	2.6
2013	154.5	22.6	-	-	91.5	43.8	20.5	20.6	-	2.0	-	11.0	366.3	3.6
2014	139.4	5.8	-	-	84.5	37.2	22.9	17.5	-	7.0	-	28.8	343.0	2.0
2015	115.9	7.0	-	-	76.6	27.9	13.3	20.9	-	-	-	20.0	281.6	1.5
2016	150.4	4.0	-	-	68.1	37.6	13.7	19.7	-	-	-	11.0	304.6	3.1
2017	124.4	-	-	-	80.2	30.9	2.6	22.1	-	2.5	-	8.0	270.8	2.8
2018	139.4	-	-	-	42.6	28.2	0.4	35.3	8.4	12.3	-	2.7	269.2	2.0
2019	96.6	-	-	-	31.2	27.7	1.7	28.7	7.9	6.2	-	2.1	202.1	1.4
2020	97.4	-	-	-	24.4	17.4	1.0	28.1	9.0	8.2	-	4.5	190.0	1.6
2021	116.3	-	-	-	22.5	17.5	-	43.0	8.9	8.2	-	10.0	231.1	1.5
2022	93.3	1.0	-	-	18.8	19.6	0.1	33.7	7.5	9.7	6.5	0.8	191.1	0.8
2023	99.5	-	-	-	9.8	28.9	0.5	25.2	10.6	2.2	7.8	3.6	188.0	2.1
2024	85.3	-	-	-	8.9	10.7	1.4	25.1	10.3	10.4	9.8	5.4	167.4	0.4

1) The category 'Other HFCs' includes all HFC's not explicated separately.

TABLE 5.
DEVELOPMENT IN BULK IMPORT OF F-GASES, TONNES

3.3 Consumption by application area

The assessment of consumption divided into categories is estimated on basis of information from importers and producers. Table 6 below contains the HFC consumption data per sub-category.

Use / Substance	HFC-134a	HFC-152a	HFC-404A	HFC-407C	HFC-507A	HFC-410A	HFC-449A	HFC-452A	HFC-32	Other	Total
Insulation foam	-	-	-	-	-	-	-	-	-	-	-
Foam systems	-	-	-	-	-	-	-	-	-	-	-
Soft foam	-	-	-	-	-	-	-	-	-	-	-
Other applications	-	-	-	-	-	-	-	-	-	-	-
Stand-alone commercial applications	0.0	-	0.0	-	-	-	-	-	-	-	0.0
Medium and large commercial refrigeration	17.5	-	8.9	-	1.4	-	5.1	-	-	5.4	38.4
Transport refrigeration	0.1	-	0.0	0.0	-	1.2	-	10.4	-	-	11.8
Mobile A/C	39.2	-	-	-	-	-	-	-	-	-	39.2
Stationary aircondition	28.4	-	-	10.7	-	23.9	5.1	-	9.8	-	77.9
Total	85.3	-	8.9	10.7	1.4	25.1	10.3	10.4	9.8	5.4	167.4

TABLE 6.

NETTO BULK IMPORT OF HFC DISTRIBUTED ON SUB SECTOR, TONNES

3.3.1 Consumption of HFC refrigerant

The consumption of HFC refrigerants has varied across categories.

The largest consumption of HFC refrigerants is related to heat pumps. Since 2015, the consumption (primarily through imported products) has increased from approx. 40 tonnes in 2015 to 66.1 tonnes in 2024. The used refrigerants are HFC-410A and HFC-32.

The use of HFCs as refrigerant in stationary A/C covers 27.8% of the total HFC refrigeration consumption in 2024. The most used refrigerants in stationary A/C are HFC-410A and HFC-134a.

The use of HFCs as refrigerant in commercial refrigeration covers 13.7% of the total HFC refrigeration consumption in 2024. The most used refrigerants in commercial refrigeration are HFC-134a and HFC-404A.

The consumption of refrigerants in mobile A/C covers 14.0% of the total consumption of HFC for refrigeration.

The consumption of refrigerants in fridges/freezers was below 1% of the total consumption in 2024. Most producers have substituted to alternative refrigerants or moved production facilities to other countries.

The consumption of refrigerants in vans and lorries for transport refrigeration covers 4.2% of the total consumption.

Consumption by application area is based on information from producers and importers, who report sales of substances from refrigerator installers and automobile workshops, etc. (only when drawing-off is more than one kg).

The consumption of refrigerants for household fridges and freezers is calculated based on information from manufacture end-users.

The consumption of refrigerants in commercial, stationary A/C systems and MAC are estimated using data and information from importers.

The table below shows the refrigerant bulk import and refrigerant import in products by weight of refrigerants according to application area.

HFC Substance/ Application	Fridges /freezers	Commercial refrigeration	Stationary A/C	Heat pumps	Mobile A/C	Refrigerated vans and trucks	Total	Percent
134a	0.0	17.5	28.4	-	39.2	0.1	85.3	30.4
404A	0.0	8.9	-	-	-	0.0	8.9	3.2
407C	-	-	10.7	-	-	-	10.7	3.8
410A	-	-	23.9	20.2	-	1.2	45.3	16.1
449A	-	5.1	5.1	-	-	-	10.3	3.7
452A	0.0	0.0	0.0	-	-	10.4	10.4	3.7
507A	-	1.4	-	-	-	-	1.4	0.5
32	-	-	9.8	93.2	-	-	103.0	36.7
Other HFC's	-	5.4	-	-	-	-	5.4	1.9
Total	0.0	38.4	77.9	113.4	39.2	11.8	280.7	-
Percent	0.0	13.7	27.8	40.4	14.0	4.2	-	100.0

TABLE 7.
COMSUMPTION OF HFC REFRIGERANT ACCORDING TO SUB CATEGORIES

3.3.2 Consumption of HFC as blowing agent and as propellant

Since 2019, the reported use of HFCs as propellants in aerosols for specific industrial purposes has been substituted with HFO-1234ze.

The import and consumption of Norfluran (HFC-134a) in Medical Dose Inhalers (MDI) was 7,0 tonnes. This is a decrease compared to the consumption of 7,1 tonnes in 2023. The import and consumption of Apafluran (HFC-227ea) in MDIs was 0.7 tonnes in 2024. This is a decrease compared to the consumption in 2022. Since 2015, the total import and consumption of HFCs in MDI has increased 89% because of extended use of MDIs with spray-function. MDIs with HFC propellant are prescribed when a patients lung capacity is not in conditions to inhale the medicine unaided.

As in previous years, there have been no reports of consumption of HFCs for chemical production, fire-extinguishing equipment, or other application areas apart from those mentioned.

3.3.3 Consumption of SF₆

The import and consumption of SF₆ in 2024 was 0.43 tonnes. Consumption of SF₆ is used for power switches in high-voltage power systems, and laboratories, including plasma erosion, analytical purposes, particle accelerators, electronic microscopes and medical services such as radiotherapy. The consumption is stipulated in the table below. The registered suppliers of SF₆ provide gas to all mentioned areas as mentioned above and it is checked through contact to consumers that no parallel import occurs (including military). The registered import from suppliers is therefore valid to determine the actual SF₆ consumption.

Consumption of SF₆ in production of double-glazed thermal windows has been banned since the 1st of January 2003 /30/.

Application area	DK consumption, tonnes
Power switches in high-voltage plants	0.43
Laboratories	0.00
Total	0.43

TABLE 8.
CONSUMPTION OF SF₆ BY SUB CATEGORIES, TONNES

The decrease in consumption may reflect the wider possibilities for replacement of alternatives to SF₆ in switch gear such as fluoroketone/fluoronitrile blends mixed with dry air or clean/synthetic air (a mixture of nitrogen and oxygen). To apply the alternatives, it require modifications to the insulation or interruption systems.

3.3.4 Consumption of PFCs

PFCs is considered phased out. There were no imports during 2018-2022 and 2024. The last recorded import was in 2023, when PFC-14 was assumed used in fiber optics production and as a refrigerant in laboratory equipment where no alternatives existed due to extreme low-temperature requirements.

4. Emission of F-gases

This section reports the actual emissions of the greenhouse F-gases HFCs, PFCs, and SF₆ for 2024. All emissions are calculated as *actual* emissions according to IPCC's tier 2 methodologies.

The emission calculation is based the revised GWP values as stated in the IPCC 2019 refinement (ref. to appendix 1). The emission modelling is based on the IPCC guidance /22/ and calculated upon collected and available data as presented in chapter 2.

The calculation is based on the reports on consumption of these substances analysed by application areas (section 3.2). For relevant product groups, adjustments have been made for imports and exports of the substances in products (see also chapter 2 for description of methodology). The specific emission calculation refers to appendix 1 and 3 which shows the particular emission factors, calculation method and assumptions, determination of IPPC Tier method etc., in relation to calculation of emissions from individual substance and application areas /4, 16, 22/.

The total GWP-weighted actual emission of HFCs, PFCs, and SF₆ in 2024 is calculated to 298,641 tonnes CO₂ equivalents. The corresponding emissions in 2023 were approx. 290,586 tonnes CO₂ equivalents. Consequently, we can notice an increased total emission of approx. 2.7% compared to 2023.

The consumption and GWP contribution for HFCs, PFCs, and SF₆ for this year and last year are shown in table 9 below.

Substance group	2023		2024	
	Consumption and imports, DK, tonnes	GWP contribution, CO ₂ eqv. tonnes	Consumption and imports, DK, tonnes	GWP contribution, CO ₂ eqv. tonnes
HFCs	301	277,816	231	286,519
PFCs	0.1	554	0.0	7
SF ₆	2.1	12,216	0.4	12,115
Total		290,586		298,641

TABLE 9.
TOTAL F-GAS CONSUMPTION AND F-GAS GWP EMISSION, TONNES

4.1 Emissions of HFCs from refrigerants

As required in the IPCC guidance for calculation of emission of F-gases a distinction is made between the different applications using refrigerants, the so called CRF categories:

- 2.F.1.a - Medium and large Commercial Refrigeration + Industrial refrigeration
- 2.F.1.b - Stand-alone Commercial Applications (Fridges and freezers for household use etc.)
- 2.F.1.d - Mobile refrigeration systems (in vans and lorries)
- 2.F.1.e - Mobile air conditioning - MAC (in cars, trucks, bus, trains etc.)
- 2.F.1.f – Stationary air condition and heat pumps

In general, the actual emissions from these sources occur in connection with:

- *Filling of refrigerants* (emission is 0.2 percent to 1.5 per cent of refilled amount depending on application area).

- *Continual release during the operational lifetime.* An assumed average value which accounts operational leakage including release occurring as a result of accident and damage (depending on application area, the average yearly emission differs from 3-17%).
- *End of Life.* Emission resulting from disposal of items and equipment in the applications differs from 0-20%. For most categories the emission is calculated as 0% because Danish legislation and waste treatment infrastructure ensures that management and treatment of refrigerants prevent uncontrolled emissions. For heat pumps the emission at decommissioning is estimated as 20% due to lack of control measures with decommissioning of air-air heat pumps from private household.

Medium and large size commercial refrigeration (2.F.1.a)

Commercial refrigeration, used e.g. in retail, supermarket, restaurants etc. or in industry, constitute the largest source of emissions. The most used refrigerants in this product group are HFC-134a, HFC-404A, HFC-449A, HFC-507A, where HFC-404A and secondly HFC-134a is the majority of the emissions in 2024.

It is not relevant to adjust for imports and exports of HFCs in large and medium size commercial refrigeration since filling of refrigerants only will take place on site when the units are installed.

Table 10 below shows the consumption, stock and actual emission of the main HFC substances used in Danish large and medium size commercial refrigeration systems. Emissions for HFCs have been converted to CO₂ equivalents in order to take into account the different GWP values of the substances and emissions for 2024, 2025, 2030 and 2040 in future scenarios are also shown.

Substance	Cosumption 2024	Stock 2024	Actual emission 2024	GWP-contribution 2024	GWP-contribution 2025	GWP-contribution 2030	GWP-contribution 2040
HFC-134a	17.5	191.3	19.4	27,749	31,429	12,039	0
HFC-404A	8.9	120.8	12.5	48,962	51,190	13,040	0
HFC-449A	5.1	23.6	2.1	2,899	3,327	3,475	0
HFC-452A	0.0	11.7	1.8	1,806	1,287	0	0
HFC-507A	1.4	27.2	3.5	14,021	10,847	0	0
Other HFCs 1)	5.4	31.9	3.0	2,968	3,784	32	0
All				98,405	101,865	28,586	0

- 1) The category "other" is calculated based on an assumption that the average GWP value is similar to HFC-410A.

TABLE 10.
CONSUMPTION, STOCK AND ACTUAL EMISSIONS AND GWP CONTRIBUTION FROM
LARGE AND MEDIUM SIZE COMMERCIAL REFRIGERATION, TONNES

As the table illustrates, the emissions from commercial refrigeration will continue for several years with a steady state consumption scenario even though there are limited installations of new larger HFC refrigeration systems because of alternative refrigerants and the statutory order /30/, which do not allow construction of new installations larger than 10 kg HFC per unit after 1st of January 2007. Thus, the EU service ban ensures, that no emissions are assumed in 2040.

In the trend analysis, the total emission from this sector is estimated to have a reduction of 71% in 2030 compared to 2024 and 100% in 2040.

Stationary air condition and heat pumps (2.F.1.f)

Stationary A/C systems are used in office buildings, by retailers etc. for comfort. Heat pumps are used both in private residential houses and in the public/private sector. The most commonly used refrigerants in this product group are HFC-32, HFC-134a, HFC-407C, HFC-410A, HFC-449A, HFC-452A.

A larger amount of HFC-410A is used in air-water heat pumps. According to the innovation in heat pumps it is expected that HFC-32 and natural refrigeration (R290) will substitute HFC-410A within a few years in a number of applications, particularly in monoblock units /34/.

Table 11 below shows the consumption, stock and actual emission for the main HFC substances used in stationary refrigeration and heat pumps. Emissions for HFCs have been converted to CO₂ equivalents to take into account the different GWP values of the substances and emissions for 2024, 2025, 2030 and 2040 in future scenarios are also shown.

Substance	Import 2024	Stock 2024	Actual emission 2024	GWP-contribution 2024	GWP-contribution 2025	GWP-contribution 2030	GWP-contribution 2040
HFC-134a	28.4	145.8	4.9	7,038	7,685	7,806	0.0
HFC-407C	10.7	248.6	11.6	20,497	19,009	11,719	0.0
HFC-407C heat pumps	0.0	0.0	0.0	0.0	0.0	0.0	0.0
HFC-410A	23.9	278.8	10.0	20,962	20,820	17,900	0.0
HFC-410A heat pumps	12.2	398.5	21.8	45,545	40,189	24,272	0.0
HFC-449A	5.1	28.7	0.7	1,031	1,215	1,780	455
HFC-452A	0.0	7.6	0.2	503	488	419	0.0
HFC-32 heat pumps	53.9	355.9	11.7	7,882	9,070	15,512	70
All				103,458	98,476	79,408	525

TABLE 11.

CONSUMPTION, STOCK AND ACTUAL EMISSIONS AND GWP CONTRIBUTION FROM STATIONARY REFRIGERATION AND HEAT PUMPS, TONNES

In the trend analysis, the total emission from this sector is estimated to peak in 2024 with 103,458 tonnes CO₂ equivalents and decrease to approximately 79,408 tonnes CO₂ equivalents in 2030 compared to 2024. The continuous increase of heat pump installed affects the range of uncertainties for the projection of actual emissions. The low GWP refrigerant HFC-32 is introduced to the market in smaller air/air heat pumps and the natural refrigerant R290 are being introduced to some air-water applications. It has positive effects on the emission trend, however there is a solid increase in the amount of heat pumps installed. From 2015 to 2022, it has increased from 30,000 units to 90,000 units sold per year. In 2024 the sold units have declined to 40,000 units. An earlier study from DEPA points out potentials for large accidental emissions from air-air heat pumps installed in private households if preventive control at end of life is lacking /33/.

Stand-alone refrigerators and freezers (2.F.1.b)

Actual emissions from refrigerants in refrigerators and freezers are determined based on consumption adjusted for imports and exports of HFCs. The calculation assumes that the refrigerant is removed and treated upon disposal so that no emission occurs (see appendix 3). The table below shows actual emissions from refrigerators/freezers in 2024, 2025 and 2030.

	HFC-134a			HFC-404A		
	2024	2025	2030	2024	2025	2030
Consumption	0.0	0.0	0.0	0.0	0.0	0.0
Emissions during production	0.0	0.0	0.0	0.0	0.0	0.0
Export	0.0	0.0	0.0	0.0	0.0	0.0
Stock	9.3	3.5	0.0	7.1	6.3	0.0
Emission from stock	0.0	0.0	0.0	0.1	0.1	0.0
Emission from destruction	0.0	0.0	0.0	0.0	0.0	0.0
Actual emission	0.0	0.0	0.0	0.1	0.1	0.0
GWP contribution, 1000 tonnes CO₂ equivalents	0.1	0.0	0.0	0.3	0.2	0.0

TABLE 12.

EMISSION OF REFRIGERANTS FROM REFRIGERATORS/FREEZERS, TONNES

Total emissions of HFC-134a and HFC-404A refrigerants from refrigerators/freezers in 2024 were estimated to 343 tonnes of CO₂ equivalents. In the future scenario of actual emissions, it is estimated that the total emissions in 2030 will decrease to 0 tonnes CO₂ equivalents caused by a decommissioning and decreasing stock.

Mobile A/C (2.F.1.e)

Emissions from mobile A/C systems are mainly due to leakage and accident damage.

Starting from 2009, the refilled and consumed amount of HFC-134a is calculated based on a Tier 2 top-down approach where the importers of HFC-134a for mobile A/C systems are isolated. The consumption of HFC-134a for mobile A/C systems is used solely for refilling. Car manufacturers outside DK carry out initial filling. With the applied approach it is possible to reduce uncertainties in determining the actual consumption of refrigerants for refilling in vehicles in Denmark.

Actual emissions from mobile A/C in 2024, 2030 and 2040 are summarized in the table below.

	2024	2030	2040
Consumption to refilling	39.2	12.8	0.0
Actual emissions	39.2	12.8	1.0
GWP contribution, 1000 tonnes CO₂ equivalents	56.0	18.4	1.5

TABLE 13.

ACTUAL EMISSION OF HFC-134a FROM MAC, TONNES

Total emissions from MAC in 2024 were estimated to 56,000 tonnes of CO₂ equivalents. In the trend analysis, the total emission from this sector is estimated to decrease with 67.2% in 2030 and will almost reach complete phase-out (97% reduction) by 2040.

Vans and lorries with transport refrigeration system (2.F.1.d)

Actual emissions from mobile refrigeration systems in vans and lorries in 2024 are from HFC-134a, HFC-404A and HFC-452A. The emissions are stipulated in the table below.

	HFC-134a			HFC-404A			HFC 452A		
	2024	2025	2030	2024	2025	2030	2024	2025	2030
Consumption	0.1	0.1	0.1	0.0	0.0	0.0	10.4	10.4	10.4
Emissions from filling	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	0.1
Emissions from stock	0.0	0.0	0.0	1.0	0.9	0.3	2.0	3.5	6.4
Stock	0.2	0.1	0.1	5.0	4.2	1.6	10.0	16.9	31.3
Actual emissions	0.1	0.0	0.0	1.0	0.9	0.3	2.1	4.0	7.4
GWP contribution, 1000 tonnes CO₂ equivalents	0.1	0.1	0.0	4.0	3.3	1.3	4.5	8.6	15.9

TABLE 14.

EMISSION FROM VANS AND LORRIES, TONNES

The total actual emission from mobile refrigeration systems in vans and lorries were estimated to 8,553 tonnes of CO₂ equivalents in 2024. In the future scenario of actual emissions, it is estimated that the total emissions in 2030 will increase to approx. 17,232 tonnes CO₂ equivalents.

4.2 Emissions of HFCs from PUR foam products and propellants

Insulation foam

There is no longer production of HFC based hard PUR insulation foam in Denmark. This production has been banned in statutory order since 1st of January 2006 /30/.

The import of HFC-134a in products with PUR insulation foam, e.g. household fridges and freezers, is zero in 2024. The calculation of actual emissions is therefore only from existing stock of household fridges and freezers.

Actual emissions of HFC-134a from insulating foam in 2024 is zero tonnes CO₂ equivalents.

Aerosol sprays

Since 2019, the use of HFC-134a in technical aerosol applications has been phased out and substituted with HFO-1234ze.

Medical Dose Inhalers (MDI)

Medical dose inhalers use Norfluran (HFC-134a) or Apafluran (HFC-227ea) as blowing agent in spray-applications.

Until 2015, calculation of emission from MDIs has been based on yearly statistics from Danish Medicines Agency. The period 2015-2018 the Danish Medicines Agency had altered their database and the extracted data on MDI had a different format.

From 2019, the calculation has been improved and based on available public data on sale of MDI spray products pr. dose (medstat.dk) combined with calculated contents of HFCs pr. dose provided by manufacturers. The content of Norfluran - HFC-134a is 25-75 mg/pr. dose, depending on product. The content of Apafluran - HFC-227ea is 69-74 mg/pr. dose depending on product. Where no producer information exists, an average of 75 mg/pr. dose is applied.

In 2020, 10 new MDI products with HFC-134a and 2 new MDI products with HFC-227ea was identified and applied for the category "medical dose inhalers" (CRF 2.F.4) for the full time series. In 2021 and 2022, new products are introduced to the market and included in the inventory.

The emission of HFC-134a and HFC-227ea from medical metered dose inhalers is estimated as 50% of the consumption in the year of application and 50% the year after.

A time-series of the emission of HFC-134a from MDI has been included in the F-gas inventory since the application was registered in 1998. A time-series of the emission of HFC-227ea from MDI has been included in the F-gas inventory from 2015, due to the new calculation method.

	HFC 134a	HFC-227ea	Total
Consumption	7.0	0.7	7.7
Actual emissions	7.0	0.7	7.7
GWP contribution, 1000 tonnes CO₂ equivalents	10.1	2.2	12.3

TABLE 15.

EMISSIONS OF HFC-134a AND HFC-227ea FROM MDI, TONNES

The total actual emission from MDI were estimated to 12,295 tonnes of CO₂ equivalents in 2024.

Optical fibre production

Both HFC and PFC were usually used for technical purposes in Danish optics fibre production. HFC-23 is used as a protection and cleaning gas in the production process. The emission factor is therefore defined as 100% release during production.

HFC-23 was not used for fibre production in 2024 (and 2015-2023).

4.3 Emissions of sulphur hexafluoride

The actual emission of SF₆ in 2024 has been calculated to 0.43 tonnes, equivalent to a GWP contribution of 11,757 tonnes CO₂ equivalents.

Emissions derive from two sources - power switches and laboratories.

Power switches in high-voltage transmission stations

Power switches are filled or refilled with SF₆, either for new installation or during service and repair. Filling is usually carried out on new installations and a smaller proportion of the consumption of SF₆ is due to refilling /11/.

Emissions from power switches in high-voltage transmission systems are calculated due to the processes involved in the following way:

- Service emission: release of 0.25 per cent on filling with new gas (average figure covering normal operation and failure/accidents)
- Stock emission: gradual release of 0.5 per cent from the stock (average figure covering normal operation and failure/accidents)

These figures are determined in a report of Danish SF₆ use in high-voltage power switches /11/.

No emissions are assumed to result from disposal since the used SF₆ is drawn off from the power switches and re-used internally by the concerned or appropriately disposed through waste collection scheme.

The table below shows the amounts involved in the processes leading to emissions and calculated actual emissions from SF₆ power switches.

	2024	2025	2030	2040
Consumption	0.4	0.4	0.3	0.3
Service emissions	0.0	0.0	0.0	0.0
Emissions from stock	0.5	0.5	0.5	0.5
Stock	102.8	102.7	101.8	100.0
Actual emissions	0.5	0.5	0.5	0.5
GWP contribution, 1000 tonnes CO₂ equivalents	11.8	11.7	11.6	11.4

TABLE 16.

EMISSION OF SF₆ FROM POWER SWITCHES, TONNES

The total actual emissions are estimated to 11,757 tonnes of CO₂ equivalents in 2024. The trend analysis forecast is a rather stable consumption of SF₆ and consequently a minor contribution to stock.

Laboratory purposes

Consumption of SF₆ in laboratories covers the following purposes:

- Plasma erosion in connection with the manufacture of microchips in clean-room laboratories
- Analytical purposes to a limited extend
- Particle accelerators
- Radiotherapy
- Electronic microscopes

The emission is calculated to zero tonnes SF₆ in 2024. Aarhus University/DTU is the only entity in Denmark using SF₆ in particle accelerators and electronic microscopes.

Double-glazed windows

From 2022 the emission from double-glazed windows has ended. Use of SF₆ in double-glazed windows was phased out in 2002, however, there were emissions from stock until 2021. The stock was estimated from consumption data from Danish producers of double-glazed windows 1992-2002 and lifetime for double-glazed windows were determined to 20 years.

4.4 Emissions of perfluorinated hydrocarbons

Medium and large size commercial refrigerators

There is no longer PFC emission from medium and large size commercial refrigerators.

Optical fibre production

The PFCs are used as protection and cleaning gases in the production process. The emission factor is therefore determined as 100% release during production. This sector has used both PFC-14 and PFC-318 for technical purpose in optics fibre production. However, PFC-318 has not been used since 2014. No consumption of PFC-14 for fibre production was reported in 2024.

Low temperature stand-alone laboratory freezers

PFC-14 can be used for specialized -60 degree low-temperature freezers for laboratory purposes. Use of PFC-14 for this purpose has been registered for the first time in Denmark in 2015. No consumption of PFC-14 for laboratory freezers was reported in 2024.

References

- /1/ Arbejdsrapport nr. 20. Forbrug og emissioner af 8 fluorerede og klorerede kulbrinter (working report no. 20 on consumption and emissions of 8 fluorinated and chlorinated hydrocarbons - only available in Danish), Danish EPA, 1996.
- /2/ Miljøprojekt nr. 523. Ozonlagsnedbrydende stoffer og visse drivhusgasser - 1998 (environmental project no. 523 on ozone-depleting substances and certain greenhouse gases - 1998 - only available in Danish), Danish EPA, 2000.
- /3/ Udenrigshandelen fordelt på varer og land. Januar-december 1989, 1990-1999 (foreign trade analysed by goods and countries. January-December 1989, 1990-1999 - only available in Danish), Statistics Denmark, foreing trade data for 1989, 1990-1999.
- /4/ IPCC, 1997: Revised 1996 IPCC Guidelines for National Greenhouse Gas Inventories.
- /5/ Ozonlaget og drivhuseffekten (the ozone layer and the greenhouse effect - only available in Danish), Danish EPA, April 1996.
- /6/ Beskyttelse af ozonlaget - nordisk perspektiv (protecting the ozone layer - a Nordic perspective - not available in English), The Nordic Council of Ministers, October, 1997.
- /7/ DEFU Komiterapport 94. Håndtering af SF₆ og dets reaktionsprodukter i elforsyningssanlæg (committee report no. 94 from DEFU (Research Institute for Danish Electric Utilities) about management of SF₆ and its reaction products in electricity supply plants).
- /8/ Methods used to Estimate Emission Inventories of Hydrofluorocarbons, Perfluorocarbons and Sulphur Hexafluoride. Draft report prepared for the UNFCCC secretariat. March Consulting, May 1999.
- /9/ Hvor kommer luftforurenningen fra? - fakta om kilder, stoffer og udvikling (where does air pollution come from? - facts about sources, substances and development - only available in Danish). Thematic report from NERI, 29/1999.
- /10/ Substitutes for Potent Greenhouse Gases - 1998 Final Report (HFCs, PFCs and SF₆), Per Henrik Pedersen, Danish EPA 1998.
- /11/ Indsamling og genanvendelse af SF₆ fra højspændingsanlæg (collection and reuse of SF₆ from high-voltage plants - only available in Danish). Tomas Sander Poulsen et al., Danish EPA 2000.
- /12/ Denmark's National Inventory Report - Submitted under the UN Convention on Climate Change. Illerup, J.B., Lyck, E., Winther, M. Rasmussen, E. NERI, 2000. Research Notes No. 127 (<http://arbejdsrapporter.dmu.dk>).
- /13/ Environmental Project No. 1168 2007: Ozone depleting substances and the greenhouse gases HFCs, PFCs and SF₆ - 2005, Danish EPA, 2007.

/14/ Denmark's National Inventory Report. Submitted under the UN Framework Convention on Climate Change 1990-1999. Emissions Inventories. Department of Policy Analysis. Illerup, Lyck, Winther, 2002. 675 pp Research Notes from NERI 149. (http://www.dmu.dk/1_viden/2_publikationer/3_arbrapporter/rapporter/AR149.pdf).

/15/ Annual Danish Atmospheric Emissions Inventory. 1999. Illerup, Andersen, Winther, Lyck, Bruun. NERI, Denmark.

/16/ Revurdering af emissionsfaktorer for kommercielle køleanlæg og mobile A/C og køleanlæg (re-evaluation of emissions from commercial refrigerators, mobile A/C systems and refrigerators - only available in Danish). Poulsen, T.S, COWI; Environmental report no. 766, Danish EPA, 2002.

/17/ D.A.F prepares statistics of registered vehicles, analysed into various categories of vehicle. These statistics are updated annually and used to calculate Danish filling of HFC-134a in vehicles.

/18/ Denmark's National Inventory Report. Submitted under the United Nations Framework Convention on Climate Change 1990-2001. Emissions Inventories. Department of Policy Analyses. Illerup, Lyck, Nielsen, Winter, Mikkelsen, 2003. Research Notes from NERI no. 181. http://www.dmu.dk/1_viden/2_Publikationer/3_arbrapporter/rapporter/AR181.pdf

.....

/19/ Denmark's National Inventory Report. Submitted under the United Nations Framework Convention on Climate Change 1990-2002. Emissions Inventories. National Environmental Research Institute, Denmark. Illerup, Lyck, Nielsen, Winter, Mikkelsen, Hoffmann, Sørensen, Vesterdahl, Fauser. 2004. Research Notes from NERI no. 196. http://www.dmu.dk/1_viden/2_Publikationer/3_arbrapporter/rapporter/AR196.pdf

/20/ Anvendelse og håndtering af SF₆-gas i højspændingsanlæg over 100kV (use and management of SF₆ in 100kV or more high-voltage plant). ELTRA Memo elt2004-47a of 18 March 2004.

/21/ Denmark's National Inventory Report 2005. Submitted under the United Nations Framework Convention on Climate Change. 1990-2003. Danmarks Miljøundersøgelser. Illerup, J.B., Lyck, E., Nielsen, M., Winther, M., Mikkelsen, M.H., Hoffmann, L., Sørensen, P.B., Fauser, P. , Thomsen, M., & Vesterdal, L. (2005): - Research Notes from NERI 211: 416 pp. (electronic). http://www2.dmu.dk/1_viden/2_Publikationer/3_arbrapporter/rapporter/AR211.pdf

/22/ Good Practice Guidance. IPCC Switzerland, 2000. <https://www.ipcc.ch/publication/good-practice-guidance-and-uncertainty-management-in-national-greenhouse-gas-inventories/>

/23/ Denmark's National Inventory Report 2006. Submitted under the United Nations Framework Convention on Climate Change. 1990-2004. Danmarks Miljøundersøgelser. Illerup, J.B., Lyck, E., Nielsen, M., Winther, M., Mikkelsen, M.H., Hoffmann, L., Sørensen, P.B., Fauser, P. , Thomsen, M., & Vesterdal, L. (2005): - Research Notes from NERI 211: 416 pp. (electronic). http://www2.dmu.dk/1_viden/2_Publikationer/3_fagrapporter/rapporter/FR589.pdf

/24/ Denmark's National Inventory Report 2007. Submitted under the United Nations Framework Convention on Climate Change. 1990-2005. National Environmental Research Institute, University of Aarhus. Illerup, J.B., Lyck, E., Nielsen, O.K., Mikkelsen, M.H., Hoff-

mann, L., Gyldenkærne, S., Nielsen, M., Winther, M., Fauser, P., Thomsen, M., Sørensen, P.B. & Vesterdal, L. (2007): - NERI Technical Report 632: 642 pp. (electronic).
http://www2.dmu.dk/Pub/FR632_Final.pdf

- /25/ Environmental Project No. 1234 2008: Ozone depleting substances and the greenhouse gases HFCs, PFCs and SF₆, 2006, Danish EPA, 2008.
- /26/ Denmark's National Inventory Report 2008. - Emission Inventories 1990-2006 - Submitted under the United Nations Framework Convention on Climate Change. National Environmental Research Institute, University of Aarhus. Nielsen, O.-K., Lyck, E., Mikkelsen, M.H., Hoffmann, L., Gyldenkærne, S., Winther, M., Nielsen, M., Fauser, P., Thomsen, M., Plejdrup, M.S., Illerup, J.B., Sørensen, P.B. & Vesterdal, L. (2008). NERI Technical Report no. 667. 701 pp
- /27/ Danish Environmental Protection Agency (DEPA), 2016: Danish consumption and emissions of F-gases (in 2014). Environmental Project No 1842. <http://mst.dk/service/publikationer/publikationsarkiv/2016/mar/danish-consumption-and-emission-of-f-gases/>
- /28/ Nielsen, O.-K., Lyck, E., Mikkelsen, M.H., Hoffmann, L., Gyldenkærne, S., Winther, M., Nielsen, M., Fauser, P., Thomsen, M., Plejdrup, M.S., Albrektsen, R., Hjelgaard, K., Johannsen, V.K., Vesterdal, L., Rasmussen, E., Arfaoui, K. & Baunbæk, L. 2010: Denmark's National Inventory Report 2010. Emission Inventories 1990-2008 - Submitted under the United Nations Framework Convention on Climate Change and the Kyoto Protocol. National Environmental Research Institute, Aarhus University, Denmark. 1178 pp. – NERI Technical Report No 784. <http://www.dmu.dk/Pub/FR784.pdf>
- /29/ Nielsen, O.-K., Mikkelsen, M.H., Hoffmann, L., Gyldenkærne, S., Winther, M., Nielsen, M., Fauser, P., Thomsen, M., Plejdrup, M.S., Albrektsen, R., Hjelgaard, K., Bruun, H.G., Johannsen, V.K., Nord-Larsen, T., Bastrup-Birk, A., Vesterdal, L., Møller, I.S., Rasmussen, E., Arfaoui, K., Baunbæk, L. & Hansen, M.G. (2013). Denmark's National Inventory Report 2013. Emission Inventories 1990-2010 - Submitted under the United Nations Framework Convention on Climate Change and the Kyoto Protocol. Aarhus University, DCE – Danish Centre for Environment and Energy, 1167 pp. Scientific Report from DCE – Danish Centre for Environment and Energy No. 19. <http://www.dmu.dk/Pub/SR19.pdf>.
- /30/ Bekendtgørelse om regulering af visse industrielle drivhusgasser, Bek. Nr. 552, 02/07 2002. <https://www.retsinformation.dk/Forms/R0710.aspx?id=12578>.
- /31/ Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkærne, S., Mikkelsen, M.H., Albrektsen, R., Thomsen, M., Hjelgaard, K., Fauser, P., Bruun, H.G., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Møller, I.S., Schou, E., Suadicani, K., Rasmussen, E., Petersen, S.B., Baunbæk, L. & Hansen, M.G. 2016. Denmark's National Inventory Report 2015 and 2016. Emission Inventories 1990-2014 - Submitted under the United Nations Framework Convention on Climate Change and the Kyoto Protocol. Aarhus University, DCE –Danish Centre for Environment and Energy, 943pp. Scientific Report from DCE – Danish Centre for Environment and Energy. <http://dce2.au.dk/pub/SR189.pdf>
- /32/ Danish Environmental Protection Agency (DEPA), 2022: Danish consumption and emissions of F-gases in 2020. Environmental Project No 2196. <https://mst.dk/service/publikationer/publikationsarkiv/2022/jan/danish-consumption-and-emission-of-f-gases-in-2020/>
- /33/ Danish Environmental Protection Agency (DEPA), 2020: Utilsigtet tab af F-gasser ved demontering af klimaanlæg og varmepumper, ISBN 978-87-7038-159-8

<https://mst.dk/service/publikationer/publikationsarkiv/2020/feb/utilsigtet-tab-af-f-gasser-ved-demontering-af-klimaanlaeg-og-varmepumper/>

- /34/ Nordic criteria for Green Public Procurement (GPP) for alternatives to high GWP HFCs in RAC products, Tomas Sander Poulsen, Per Henrik Pedersen, Nordic Council of Ministers, 2020, 2020:512, <https://www.norden.org/en/publication/nordic-criteria-green-public-procurement-gpp-alternatives-high-gwp-hfcs-rac-products>
- /35/ 2019 Refinement to the 2006 IPCC Guidelines for National Greenhouse Gas Inventories. <https://www.ipcc.ch/report/2019-refinement-to-the-2006-ipcc-guidelines-for-national-greenhouse-gas-inventories/>
- /36/ Danish Environmental Protection Agency (DEPA), 2025: Danish consumption and emissions of F-gases – 2023. Environmental Project No 2285. <https://www2.mst.dk/Udgiv/publications/2025/01/978-87-7038-697-5.pdf>
- /37/ Nielsen, O.-K., Plejdrup, M.S., Winther, M., Nielsen, M., Gyldenkærne, S., Mikkelsen, M.H., Albrektsen, R., Hjelgaard, K., Fauser, P., Bruun, H.G., Levin, L., Callisen, L.W., Andersen, T.A., Johannsen, V.K., Nord-Larsen, T., Vesterdal, L., Stupak, I., Scott-Bentsen, N., Rasmussen, E., Petersen, S.B., Baunbæk, L., & Hansen, M.G. 2023. Denmark's National Inventory Report 2023. Emission Inventories 1990-2021 - Submitted under the United Nations Framework Convention on Climate Change. Aarhus University, DCE – Danish Centre for Environment and Energy, 933 pp. Scientific Report No. 541 <http://dce2.au.dk/pub/SR541.pdf>

Appendix 1. GWP values for F-gases

F-gases relevant for Denmark, their chemical formulas and Global Warming Potential (GWP) values used for reporting to the UN Climate Convention and the Kyoto Protocol (values from IPCC new revised GWP values to be implemented no later than 2015)

Substance / Blend	Chemical formula	GWP value
HFC-23	CHF ₃	14,800
HFC-32	CH ₂ FH ₂	675
HFC-41	CH3F	92
HFC-125	C ₂ HF ₅	3,500
HFC-134	C ₂ H ₂ F ₄	1,100
HFC-134a	CF ₃ CFH ₂	1,430
HFC-143	CHF ₂ CH ₂ F	353
HFC-143a	CF ₃ CH ₃	4,470
HFC-152	CH ₂ FCH ₂ F	53
HFC-152a	CF ₂ HCH ₃	124
HFC-161	CH ₃ CH ₂ F	12
HFC-227ea	C ₃ HF ₇	3,220
HFC-236cb	CH ₂ FCF ₂ CF ₃	1,340
HFC-236ea	CHF ₂ CHFCF ₃	1,370
HFC-365mfc	CH ₃ CF ₂ CH ₂ CF ₃	794
HFC-245ca	C ₃ H ₃ F ₅	693
HFC-245fa	CHF ₂ CH ₂ CF ₃	1,030
HFC-404A ⁽¹⁾	Blend	3,922
HFC-401A ⁽²⁾	Blend	18
HFC-402A ⁽³⁾	Blend	2,100
HFC-407C ⁽⁴⁾	Blend	1,774
HFC-408A ⁽⁵⁾	Blend	1,030
HFC-409A ⁽⁶⁾	Blend	0
HFC-410A ⁽⁷⁾	Blend	2,088
HFC-449A ⁽⁷⁾	Blend	1,409
HFC-452A ⁽⁷⁾	Blend	1,397
HFC-507 ⁽⁸⁾	Blend	3,985
Sulphurhexafluoride	SF ₆	22,800
PFC-14	CF ₄	7,390
PFC-116	C ₂ F ₆	12,200
PFC-218	C ₃ F ₈	8,830
PFC-3-1-10	C ₄ F ₁₀	8,860
PFC-318	c-C ₄ F ₈	10,300
PFC-4-1-12	C ₅ F ₁₂	9,160
PFC-5-1-14	C ₆ -F ₁₄	9,300
PFC-9-1-18b	C ₁₀ F ₁₈	7,500
Perfluorocyclopropane		17,340
Nitrogen Trifluoride	NF ₃	17,200

(1) Mixture consisting of 52 % HFC-143a, 44 % HFC-125 and 4 % HFC-134a.

(2) Mixture consisting of 53 % HCFC-22, 13 % HFC-152a and 34 % HCFC-124.

- (3) Mixture consisting of 38 % HCFC-22, 60 % HFC-125 and 2 % propane.
- (4) Mixture consisting of 25 % HFC-125, 52 % HFC-134a, and 23 % HFC-32.
- (5) Mixture consisting of 46 % HFC-143a and 7 % HFC-125.
- (6) A HCFC mixture consisting of HCFCs, where the GWP is 0, since the mixture does not contain greenhouse gases. The real GWP value is 1,440.
- (7) Mixture consisting of 50 % HFC-32 and 50 % HFC-125
- (8) Mixture consisting of 50 % HFC-125, 50 % HFC-143a.

Appendix 2. Assessment of Good Practice Guidance compliance in DK f-gas calculation

The Danish F-gas emissions are calculated for the historical years up to 2010. The time series of emissions are calculated using Good practice principles and the series goes back to 1993, but are to be considered complete from the year 1995.

Key Source Categories

F-gases are determined as a key source category. The contribution of F-gases to national greenhouse gas emission is approx. 1.3 % of total emission excl. LULUCF in the most recent historical years of the inventories.

Future trend scenarios

A trend scenario is elaborated until 2020. The scenario is based on a “steady state” trend but with an inclusion of dates for phase out of determined substances as stated in legal acts.

Methodology

In the following the relevant decision trees from the GPG (Good Practice Guidance) chapter 3 are investigated with respect to the Danish F-gas calculations compliance with GPG.

For the Danish calculation of F-gases it is basically a Tier 2 bottom up approach which is used, while data is reported from identified importers and users of F-gasses in DK. As for verification using import/export data a Tier 2 top down approach is applied. In an annex 3 to the F-gas emission report (Environmental Protection Agency), there is a specification of the applied approach for each sub source category.

Emission factors

Consumption data of F-gases are provided by suppliers and/or producers. Emission factors are primarily defaults from GPG which are assessed to be applicable in a national context.

In case of commercial refrigerants and Mobile Air Condition (MAC), emissions are defined as similar to consumption in year X. Consumption is determined from data directly from suppliers.

Import/export data

Import/export data for sub category sources where import/export are relevant (fridge/freezers for household) are quantified on estimates from import/export statistic of products + default values of amount of gas in product. The estimates are transparent and described in the annex referred to above.

Import/export data for system foam and commercial refrigerators and stationary air condition are specified in the reporting from importers and users.

Consistency

The time series are consistent as regards methodology. No potential emission estimates are included as emissions in the time series and same emission factors are used for all years.

Reporting and documentation

The national inventories for F-gases are provided on a yearly basis and documented in a yearly report (Environmental Protection Agency).

Detailed data from importers and users and calculations are available and archived in electronic version. The report contains summaries of EF used and information on sources. Further details on methodology and EF are included in annex to the report.

Activity data are described in a spread sheet for the current year. The spread sheet contains the current year as well as the years back. The current version is used with spreadsheet for data for the current year linking to the Danish inventory databases and for the CRF format. In case of changes to the previous reported data this is work out in spreadsheet versions accordingly and reported with explanations as required in the CRF format.

Source specific QA/QC and verification

Comparison of emissions estimates using different approaches

Inventory agencies should use the Tier 1 potential emissions method for a check on the Tier 2 actual emission estimates. Inventory agencies may consider developing accounting models that can reconcile potential and actual emissions estimates and may improve determination of emission factors over time.

This comparison has been carried out in 1995-1997 and for all three years it shows a difference of approx. factor 3 higher emissions by using potential emission estimates.

Inventory agencies should compare bottom-up estimates with the top-down Tier 2 approach, since bottom-up emission factors have the highest associated uncertainty. This technique will also minimise the possibility that certain end-uses are not accounted for in the bottom-up approach.

This exercise has been partly conducted since data from importers (top down) are assessed against data from users (bottom up) to ensure, that import and consumption are more or less equal. The consumption reported from users are always adjusted to the import of substances, which are the most exact data we have.

The uncertainty due to this is, if not all importers are identified because new importers are introduced to the DK market.

National activity data check

For the Tier 2a (bottom-up) method, inventory agencies should evaluate the QA/QC procedures associated with estimating equipment and product inventories to ensure that they meet the general procedures outlined in the QA/QC plan and that representative sampling procedures were used.

No QA/QC plan specifically for the F-gas calculation is developed. However, QC procedures were carried out as described below.

The spread sheets containing activity data has incorporated several data-control mechanisms, which ensure, that data estimates do not contain calculation failures. A very comprehensive

QC procedure on the data in the model for the whole time-series has for this submission been carried out in connection to the process which provided (1) data for the CRF background Tables 2(II). For the years (1993)-2002 and (2) provided data for potential emissions in CRF Tables 2(I). This procedure consisted of a check of the input data for the model for each substance. As regards the HFCs this checking was done according to their trade names. Conversion was made to the HFCs substances used in the CRF tables etc. A QC was that emission of the substances could be calculated and checked comparing results from the substances as trade names and as the "no-mixture" substances used in the CRF.

Emission factors check

Emission factors used for the Tier 2a (bottom-up) method should be based on country-specific studies. Inventory agencies should compare these factors with the default values. They should determine if the country-specific values are reasonable, given similarities or differences between the national source category and the source represented by the defaults. Any differences between country specific factors and default factors should be explained and documented.

Country specific emission factors are explained and documented for MAC and commercial refrigerants and SF6 in electric equipment. Separate studies have been carried out and reported. For other sub source categories, the country specific emission factor is assessed to be the same as the IPCC default emission factors.

Emission check

The F-gas inventory is developed and made available in full in spread sheets. Input data are HFC data registered by trade names and emission is calculated from HFC tradename but also organized and checked as pure HFC substances.

Uncertainties

In general uncertainty in inventories will arise through at least three different processes:

- A. Uncertainties from definitions (e.g. meaning incomplete, unclear, or faulty definition of an emission or uptake);
- B. Uncertainties from natural variability of the process that produces an emission or uptake;
- C. Uncertainties resulting from the assessment of the process or quantity, including, depending on the method used,: (i) uncertainties from measuring; (ii) uncertainties from sampling; (iii) uncertainties from reference data that may be incompletely described; and (iv) uncertainties from expert judgement.

Uncertainties due to poor definitions are not expected as an issue in the F-gas inventory. The definitions of chemicals, the factors, sub source categories in industries etc. are well defined.

Uncertainties from natural variability are probably occurring in a short term time period, while estimating emissions in individual years. But in a long time period – 10-15 years, these variabilities levels out in the total emission, because input data (consumption of F-gases) are known and are valid data and have no natural variability due to the chemicals' stable nature.

Uncertainties that arise due to imperfect measurement and assessment are probably an issue for:

emission from MAC (HFC-134a)
emission from commercial refrigerants (HFC-134a)

which lead to inexact values of the specific consumption of F-gases.

The uncertainty varies from substance to substance. Uncertainty is greatest for HFC-134a due to a widespread application in products that are imported and exported. The greatest uncertainty in the areas of application is expected to arise from consumption of HFC-404a and HFC-134a in commercial refrigerators and mobile refrigerators. The uncertainty on year to year data is influenced by the uncertainty on the rates at which the substances are released. This results in significant differences in the emission determinations in the short term (approx. five years), differences that balances in the long term.

In connection to the work on the Danish National Inventory report general uncertainty estimates for F-gases have been worked out to make the uncertainties for the Danish inventories complete.

Further improvement of uncertainty analysis with respect to the calculation of F-gas emissions are to be considered in future calculations.

Appendix 3. Specific methods and assumptions

Specification of methods and assumptions for determination of emissions as well as projections of GWP in accordance with
IPCC Good Practise Guidance and Uncertainty Management in National Greenhouse Gas Inventory

ID	Source	Substance	Methods	Emission factor	Remarks	Projection assumptions
	<i>Refrigerant</i>					
2.F.1.b	Household fridges and freezers (Stand-alone commercial applications)	HFC-134a	<p>Tier 2 top-down approach:</p> <ul style="list-style-type: none"> - information on refrigerant consumption provided by reports from the main producers of household fridges and freezers in DK. Information on refrigerant consumption provided by reports from the main producers of household fridges and freezers in DK, accounting for no less than an estimated 95% of the market. <p>Tier 2 bottom-up approach:</p> <ul style="list-style-type: none"> - information on imports and exports of refrigerants in products based on the average quantity contained per unit and Danish statistics. 	<p>OK according to new IPCC values</p> <ul style="list-style-type: none"> - release on filling = 2% (IPCC default – 0.5-3%) 1 % release from stock per year (IPCC default – 1-10%) Lifetime = 15 years (IPCC default 10-15 years)) Recovery: 100%. Up to and including 2000, the quantity remaining upon disposal was included as emissions (IPCC default). Legislation in Denmark ensures drawing-off of refrigerant, and consequently, the IPCC default is misleading in the Danish context. (IPCC default 0-80% of initial charge) 	<p>Stock determined in 1998 for the period 1990-1998 based on information on consumption from Danish producers and estimates based on import/export statistics and average quantity of HFC contained in refrigerant and foam per unit (source: /2/). For the updating of stock, import/export data from 1998 are used, as well as information on annual HFC consumption by Danish producers. 1998 import/export data are = net exports of 141 tonnes HFC-134a refrigerant + net exports of 1.6 tonnes HFC-134a in foam (note: DK's largest exporter does not use HFC for foam)</p>	<p>From 2001, net exports of refrigerants in household fridges are assumed to account for 50 per cent of consumption. The consumption in the projection is not influenced by new phasing-out regulations. It is assumed that the consumption of refrigerants is equal to previous year until 2025. Then it is reduced by 20 per cent with reference to the latest imported amount.</p>

				moulding, therefore the export of HFC in foam is less than the export of refrigerants).		
2.F.1.a	Commercial refrigerators in retail stores, industry, etc (medium and large commercial refrigerators)	HFC-134a, HFC-404a, HFC-507A, HFC-449A, HFC-452A, other HFCs, PFCs (C ₃ F ₈)	<p>Tier 2 top-down approach:</p> <ul style="list-style-type: none"> - information on refrigerant consumption was provided by importers/suppliers of refrigerants for commercial refrigerators in DK. - information on distribution of refrigerant consumption at different sites is estimated using information from user enterprises, the KMO and estimates from suppliers. 	<p>1.5% on refilling (DK default) (IPCC default 0.5-3%)</p> <p>10% release from operation and accidents (DK default).</p> <p>Recovery: 88.5%</p> <p>Emission at decommissioning: 11.5%</p> <p>Lifetime: 15 years</p> <p>In the case of re-use it is assumed release occurs during the cleaning process equivalent to 2%. It is <i>good practice</i> not to account for any re-use since the original is accounted for in sales and imports.</p> <p>(IPCC default for lifetime - 15years)</p>	<p>An interpolation has been conducted for HFC-134a, year 1995. The interpolation is the average of 1996/1997. Interpolation is found necessary because 1995 are reference year and the consumption this year was 0 due to lack of data.</p> <p>In 2001/2002 an assessment was made of the national Danish leakage rate from commercial plants. This assessment was carried out by COWI for the Danish EPA. This result has led to a decrease in the leakage rates for filling, operation and disposal in compliance with IPCC guidelines /16/.</p>	<p>It is assumed that the consumption of old refrigerants for refilling stock will be equal to previous year until 2025. Then it is reduced by 20 per cent with reference to the latest imported amount.</p> <p>For HFC-449A and HFC-452a, the consumption is steady state (same as latest import data)</p>

2.F.1.f	Stationary A/C systems and heat pumps	HFC-32 HFC-134a, HFC-407C, HFC-410A, HFC-449A, HFC-452A	Tier 2 top-down approach: - information on refrigerant consumption was provided by importers/suppliers of refrigerants for commercial refrigerators in DK. - information on distribution of refrigerant consumption at different sites is estimated using information from user enterprises, the KMO and estimates from suppliers.	1990-2009: 1.5% on refilling (DK default) (IPCC default 0,5-3%) 2010-2030: 0.5% on refilling. 1990-2009: 10% release from operation and accidents (DK default). 2010-2030: 3% release from operation and accidents Recovery: 88.5% Decommissioning: 11.5% Lifetime: 15 years In the case of re-use it is assumed release occurs during the cleaning process equivalent to 2%. It is <i>good practice</i> not to account for any re-use since the original is accounted for in sales and imports. (IPCC default for lifetime - 15years)	An interpolation has been conducted for HFC-134a, year 1995. The interpolation is the average of 1996/1997. Interpolation is found necessary because 1995 is the reference year and the consumption this year was 0 due to lack of data. In 2001/2002 an assessment was made of the national Danish leakage rate from commercial plants. This assessment was carried out by COWI for the Danish EPA. This result has led to a decrease in the leakage rates for filling, operation and disposal in compliance with IPCC guidelines /16/.	It is assumed that the consumption of old refrigerants for refilling stock will be equal to previous year until 2025. Then it is reduced by 20 per cent with reference to the latest imported amount. For HFC-449A and HFC-452a, the consumption is steady state (same as latest import data)
2.F.1.d	Refrigerated vans and lorries	HFC-134a, HFC-404a, HFC-452a	Tier 2 top-down approach - information on refrigerant consumption in refrigerated vans and lorries is based on consumption information from refrigerated transport companies as well as data from the KMO.	0.5% on refilling (DK default) 17% from operation annually (DK default, same as IPCC) 2% in reuse (DK default) Lifetime = 6-8 years Recovery: 88.5%	In 2001/2002 an assessment was made of the national Danish leakage rate from refrigerated vans and lorries. This assessment was carried out by COWI for the Danish EPA. This result has led to a decrease in the leakage rates for filling and disposal in compliance with IPCC guidelines. The leakage rate for operation is still 17% in	The tax effect has not been included, since refrigerated vans and lorries are exempt from taxes. Consumption is projected as steady state with reference to the latest import data

					compliance with IPCC guidelines /16/.	
2.F.1.e	Mobile A/C systems	HFC-134a	Tier 2 top-down approach used for gathering of import/sales data from importers that supplies the Danish market with refrigerants to mobile A/C systems.	Consumption = refilling in mobil A/C = emission. Recovery: 88.5% until 2011 After 2011, emissions = consumption to service.		The projection is based on a steady state with reference to the latest import data. From 2026 a reduction of 20% pr. year is assumed with reference to the effects from the MAC directive.
	<i>Foam production</i>					
2.F.2	Foam in household fridges and freezers (closed cell)	HFC-134a	Tier 2 top-down + bottom-up approach: - information on refrigerant consumption provided by reports from the main producers of household fridges and freezers in DK.	10% release in foam production (IPCC default) 4.5% release from stock per year (IPCC default) Lifetime = 15 years (DK default) Recovery: 100% 33% remaining upon disposal which is destroyed in incineration and thereby is not released as emissions (DK default).	Stock of HFC in foam determined in 1998 for the period 1990-1998 based on information from Danish producers and estimates based on import/export statistics and average quantity of HFC contained in refrigerant and foam per unit /2/. For the updating of stock, import/export data from 1998 are used, as well as information on annual HFC consumption by Danish producers. 1998 import/export data are = net exports of 141 tonnes HFC-134a refrigerant + net exports of 1.6 tonnes HFC-134a in foam	

					(note: DK's largest exporter does not use HFC for foam moulding, therefore the export of HFC in foam is less than the export of refrigerants).	
2.F.2	Soft foam (open cell)	HFC-134a HFC-152a Other HFCs (HFC-365)	Tier 2 - information on foam blowing agents for soft foam is derived from reports provided by the main producer in Denmark, which still employs HFC in foaming processes. This producer is thought to represent approx. 80% of the Danish soft foam consumption.	Emissions = 100% of the HFCs sold in the current year (IPCC default)		
2.F.2	Joint filler (open cell)	HFC-134a HFC-152a	Tier 2 top-down approach. - There are no longer any Danish producers of joint filler employing HFC as a foaming agent. Emissions are due to previous estimates by producers of imported joint filler products.	Emissions = 100% of imported quantity contained in joint filler in the current year (IPCC default).	The estimated imports in 1998 by a joint filler producer were 10 tonnes HFC-134a and 1 tonne HFC-152a. This estimate was based on the assumption that there is an average of 100 g HFC-134a and 25 g HFC-152a per tin of joint filler imported.	
2.F.2	Foaming of poly-ether (for shoe soles)	HFC-134a HFC-152a	Tier 2 top-down approach Information regarding consumption is identical to the consumption reported by producer in 1999 + an estimate of imports/exports of HFC in shoe soles, 1998. Tier 2 bottom-up approach:	Emission (Danish default): - Production = 15 % - Use = 4.5 % - Lifetime = 3 years - Disposal = 71.5%, destroyed in incineration and thereby not released as emissions.	The calculation of the HFC stock in shoe soles is based on the following assumptions: it is assumed that 5% of all shoes with plastic, rubber and leather soles contain polyether containing 8 g of HFC-134a per shoe.	

			Imports of HFCs contained in shoes are based on the average amount per shoe and on Danish statistics.		Net export with the same consumption in Danish production is 0.3 tonnes HFC-134a.	
2.F.2	System foam (for panels, insulation, etc.)	HFC-134a HFC-152a Other HFCs (HFC-365)	Bottom-up Tier 2 approach on the basis of information from enterprises	Emissions = 0. HFC is used as a component in semi-manufactured goods and emissions first occur when the goods are put into use.	All system foam produced in Denmark is exported, therefore emissions can only occur in the country where the goods are put into use.	
	<i>Aerosols</i>					
2.F.4	Aerosol sprays (industrial products)	HFC-134a	Tier 2. - information on propellant consumption is derived from reports on consumption from the only major producers of HFC-containing aerosol sprays in Denmark. The importers are estimated to account for 100% of Danish consumption.	Emissions = 50% of the HFC sold to this area of application in the current year and 50% of the consumption in the second year (IPCC default for top-down data)	Top-down data. Estimates of imports/exports are based on the producer's assessment of imports equivalent to 20% of Danish production in the current year. Exports are quantified by the producer.	
2.F.4	MDI (metered dose inhalers)	HFC-134a HFC-227ea	Tier 2 bottom-up approach - information on consumption is based on data from the national medical trade statistics concerning total sale of MDI in Denmark. Data from producers concerning product content of HFC-134a are used to calculate amount used pr. year. A unit factor of 72 mg HFC-134a/pr. dose is used for the calculation. The estimate for 2018 is based on 2015, 2016 and 2017. Due to change in the format of the national medical trade statistics. A reduction of 10 per cent	Emissions = 50% of the HFC sold to this area of application in the current year and 50% of the consumption in the second year (IPCC default for top-down data)	HFC is used in MDI as a subsidiary for effective inhale of the medicine. It is assumed that 100 % of the subsidiary emits. The 50/50 calculation method are introduced in full time-series from 2022. Previously it was 100% emission the year for consumption.	Steady state with reference to the latest registered import.

			is added to the previous year's estimated consumption, to create consistency with the decrease seen throughout previous years.			
	<i>Solvents</i>					
2.F.5	Liquid cleaners	PFC (C ₃ F ₈ Perfluoropropane)	Tier 2. - information on consumption of PFC in liquid cleaners is derived from two importers' sales reports. This is thought to represent 100% of the Danish consumption of PFCs in liquid cleaners.	Emissions = 50% of the HFC sold to this area of application in the current year and 50% of the consumption in the second year (IPCC good practice for top-down data)		Top-down data Phasing-out cf. Statutory Order 1/9 2002. It is assumed that the consumption is equally distributed over all months.
	<i>Others</i>					
2.G.2	Fibre Optics production	PFC-14 PFC-318 HFC-227ea	Tier 2. - information on consumption of PFC in production of fibre optics is derived from importers' sales report with specific information on the amount used for production of fibre optics. This is thought to represent 100% of the Danish consumption of PFC-14 and PFC-318 for that purpose	Emission = 100% in the production year = year for consumption	This is a new consumption area which are added for first time in 2006 emission calculation.	It is considered that consumption will be steady state in projection estimated.
	EMISSIONS OF SF ₆ FROM ELECTRICAL EQUIPMENT AND OTHER SOURCES					
2.G.2	Insulation gas in double glazing	SF ₆	Tier 2 - information on consumption of SF ₆ in double glazing is derived from importers' sales reports to the application area. The importers account for	Emission (DK-default): - 15% during production of double glazing. - 1% per year during the lifetime of the window		Emissions data and lifetimes are based on information from the window producers and industry experts in Denmark /2/.

			100% of the Danish sales of SF ₆ for double glazing. In addition, the largest producer of windows in Denmark has provided consumption data, with which import information is compared.	- Lifetime = 20 years - Disposal - 80% of the filled content of double glazing in the production year. - Net exports = 50% of the consumption in the current year		The stock is determined on the basis of consumption information provided by importers back to 1990. The first Danish consumption was registered in 1991. In the projection of emissions, it is assumed that the consumption of SF ₆ in Danish window production was phased out in 2003, after which emissions only arise from stock.
2.G.1	Insulation gas in high-voltage power switches	SF ₆	Tier 3c country-level mass-balance approach - information on consumption of SF ₆ in high-voltage power switches is derived from importers' sales reports (gas or gas-containing products). The importers account for 100% of the Danish sales of SF ₆ . The electricity sector also provides information on the installation of new plants and thus whether the stock is increasing.	Emission (Danish default): - release on filling = 5% until 2022/0,25 from 2023 - loss / release in operation = 0.5% per year - release upon disposal = 0%		There is one supplier (Siemens) that imports its own gas for filling in Denmark. Suppliers (AAB, Siemens, Alstom) report on new installations. The stock in 2000 was 57.6 tonnes of SF ₆ , which covers power switches of all sizes in production and transmission plants. The stock has been evaluated on

						the basis of a questionnaire survey in 1999 which encompassed the entire Danish electricity sector /11/.
2.G.2	Shock-absorbing gas in Nike Air training footwear	SF ₆	Tier 2 - top-down approach Importer has estimated imports to Denmark of SF ₆ in training footwear.	Lifetime = 5 years		Importer/wholesaler reports that imports for the period 1990-1998 amounted to approx. 1 tonne, equivalent to emissions of 0.11 tonnes per year in the period 1995-2003. For the period 1999-2005, the importer estimated imports to represent approx. 1/3, corresponding to 0.037 tonnes per year in the period 2004-2010.
2.G.2	Laboratories	SF ₆	Tier 2. - information on consumption of SF ₆ for laboratories is derived from importers' sales reports (gas or gas-containing products). The importers account for 100% of the Danish sales of SF ₆ .	Emissions = 50% of the HFC sold to this area of application in the current year and 50% of the consumption in the second year (IPCC default for top-down data)	The 50/50 calculation method are introduced in full time-series from 2022. Previously it was 100% emission the year for consumption.	

Danish consumption and emission of F-gases

The F-gases are potent greenhouse gases and cause an increase in the ability of the atmosphere to retain surplus heat radiated from the earth. Consequently the temperature of the earth's surface and lower atmosphere is rising and this leads to climate changes. The potential effect of different greenhouse gases varies from substance to substance. This potential is expressed by a GWP value (Global Warming Potential).

The project quantifies the Danish consumption and actual emissions of F-gases (HFCs, PFCs, and SF₆) on a yearly basis. Furthermore, future-emissions for F-gases are projected.

The emission calculation is partly conducted to fulfil Denmark's international obligations to provide data and information on F-gas emissions, and partly to assess the Danish trend in consumption and emissions of HFCs, PFCs, and SF₆.

New requirements to F-gas emission calculation introduced by United Nations Intergovernmental Panel for Climate Change (IPCC) are continuously integrated. It comprises methodology requirements to new F-gases, new emission factors for certain F-gases, new application areas and changes in product lifetime.

The emission calculations are in compliance with the most recent revised IPCC methodologies.



The Danish Environmental
Protection Agency
Lerchesgade 35
DK - 5000 Odense C

www.mst.dk